C228a

14401

Electronic Automatic Temperature Control (EATC) module (19980)

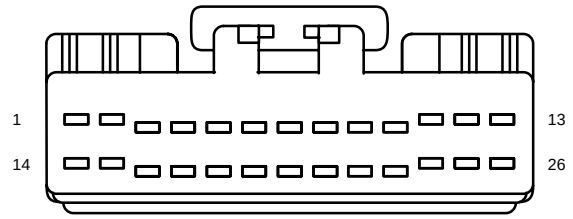

F26015

Pin	Circuit	Circuit function
1	–	not used
2	676 (PK/OG)	logic ground
3	752 (YE/RD)	Blower motor speed controller, Signal return
4	436 (RD/LG)	Blend door actuator, position sense +
5	1070 (BN/LB)	to heater/A/C controls, in steering wheel
6	–	not used
7	3061 (LB/OG)	Ambient air temperature sensor (19E702) +
8	–	not used
9	1112 (WH/LB)	Remote solenoid assembly, common
10	261 (OG/BK)	Blower motor, High
11	1111 (VT)	Remote solenoid assembly, control
12	1110 (LG/VT)	Remote solenoid assembly, control
13	1107 (WH)	Remote solenoid assembly, control
14	19 (LB/RD)	Illumination dimmer
15	–	not used
16	754 (LG/WH)	Blower motor speed controller, command
17	–	not used
18	–	not used
19	790 (WH/OG)	Temperature, Vehicle interior +
20	217 (DB/OG)	Sunload sensor (19E663), signal
21	437 (YE/LG)	Blend door actuator, position sense, monitor
22	–	not used
23	399 (BN/YE)	Blower motor relay, control
24	–	not used
25	1109 (OG/BK)	Remote solenoid assembly, control
26	1108 (TN/WH)	Remote solenoid assembly, control

C228b

14401

Electronic Automatic Temperature Control (EATC) module (19980)

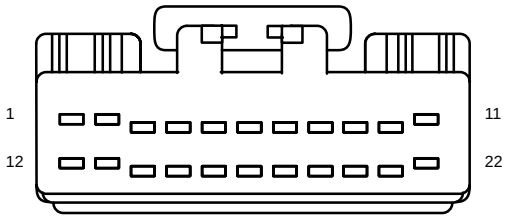

F22017

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	693 (OG)	UBP Diagnostics
4	–	not used
5	470 (PK/BK)	Sensor signal return (reference/ground)
6	438 (RD/WH)	Blend door actuator, signal –
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	22 (LB/BK)	Voltage supplied at all times (overload protected)
12	–	not used
13	–	not used
14	–	not used
15	–	not used
16	–	not used
17	–	not used
18	348 (VT)	A/C demand signal
19	250 (OG)	Blend door actuator, control
20	249 (DB/LG)	Blend door actuator, control
21	–	not used
22	296 (WH/VT)	Voltage in Run (overload protected)