C290b (BK)

14401/14588

Radio (18806)

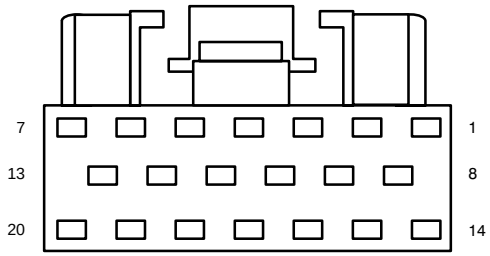

F20023

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	–	not used
4	–	not used
5	1068 (LG/BK)	Audio System ON (ASYSON)
6	832 (LB/PK)	Audio corporate protocol A
7	833 (TN)	Audio corporate protocol B
8	–	not used
9	–	not used
10	723 (GY/RD)	Cellular phone, wake up
11	724 (LB/YE)	Radio (18806), to cellular phone, audio –
12	725 (PK)	Radio (18806), to cellular phone, audio +
13	48	Shield
14	–	not used
15	–	not used
16	48	Shield
17	1561 (OG)	Audio signal positive, Right
18	1562 (YE)	Audio signal negative, Right
19	1559 (RD)	Audio signal positive, Left
20	1560 (WH)	Audio signal negative, Left

C293 (WH)

18B574

Front blower motor resistor assembly



F04074

Pin	Circuit	Circuit function
1	269 (LB/OG)	Blower motor, medium low
2	261 (OG/BK)	Blower motor, speed control
3	1205 (BK)	Ground
4	260 (RD/OG)	Blower motor, medium high

C294a (BK)

14401

Function selector switch assembly, front



F12077

Pin	Circuit	Circuit function
1	1418 (LB/WH)	Illumination
2	1205 (BK)	Ground
3	687 (GY/YE)	Temperature position sense, signal
4	1422 (DB/OG)	Blend door actuator, rear (19E616), control
5	1423 (WH/BK)	Auxiliary blower motor (19805), speed control, output
6	1205 (BK)	Ground, Illumination
7	1425 (GY/WH)	indicator, A/C System On, control
8	1424 (TN/BK)	Air conditioning, On/Off signal
9	1410 (TN/OG)	switch, return
10	1426 (PK)	Rear window defrost, On/Off signal
11	1427 (TN/LB)	indicator, Rear window defrost, control
12	1040 (RD/BK)	Voltage in Run (overload protected)