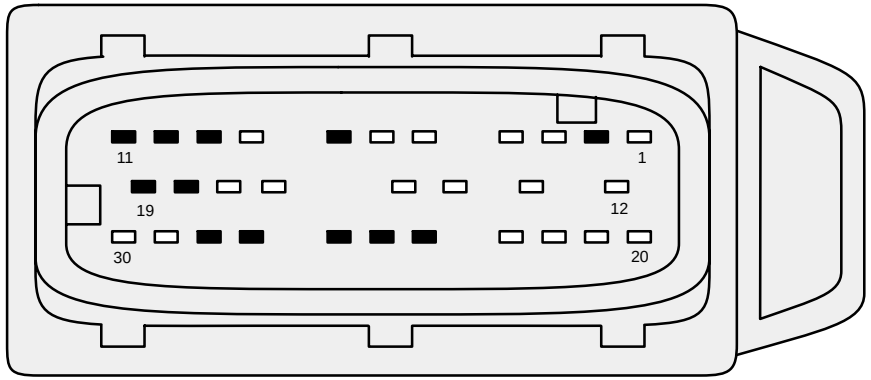

C162 (BLACK)

ANTI-LOCK BRAKE MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
1	523 (RD/PK)	Right Rear Brake Sensor (High)	16	977 (VT/WH)	Brake Fluid Level Switch Signal
2	–	NOT USED	17	959 (GY)	Traction Assist On
3	524 (PK/BK)	Right Rear Brake Sensor (Low)	18	–	NOT USED
4	514 (YE/RD)	Right Front Brake Sensor (High)	19	–	NOT USED
5	516 (YE/BK)	Right Rear Brake Sensor (Low)	20	521 (TN/OG)	Left Front Brake Sensor (High)
6	810 (RD/LG)	Brake Pedal Position (BPP) Switch Signal	21	522 (TN/BK)	Left Rear Brake Sensor (Low)
7	–	NOT USED	22	518 (LG/RD)	Left Rear Brake Sensor (High)
8	88 (BK/WH)	Power (Hot in Run)	23	519 (LG/BK)	Left Rear Brake Sensor (Low)
9	–	NOT USED	24	–	NOT USED
10	–	NOT USED	25	–	NOT USED
11	–	NOT USED	26	–	NOT USED
12	57 (BK)	Ground	27	–	NOT USED
13	601 (LB/PK)	Power (Hot at All Times)	28	–	NOT USED
14	483 (RD)	Power (Hot at All Times)	29	915 (PK/LB)	SCP Data Bus (–)
15	57 (BK)	Ground	30	914 (TN/OG)	SCP Data Bus (+)