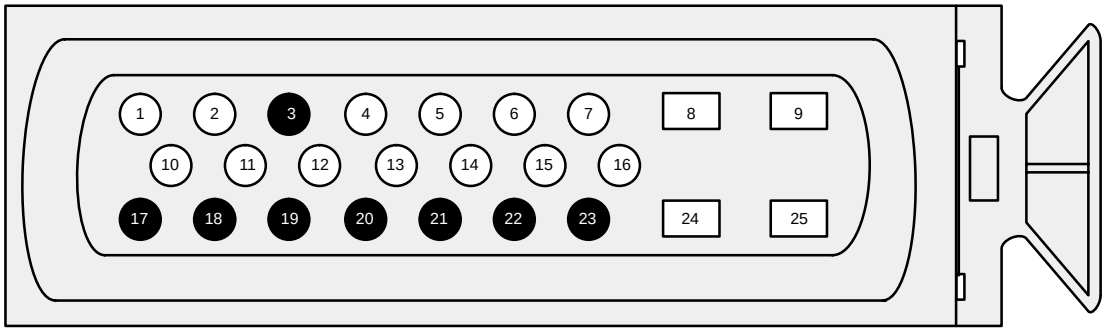

C146

4 WHEEL ANTI-LOCK BRAKE SYSTEM (4WABS) MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
1	70 (LB/WH)	Diagnostic Trigger Circuit	14	523 (RD/PK)	Rear Sensor (HIGH)
2	810 (RD/LG)	Brake Pedal Position (BPP) Switch	15	603 (DG)	4WABS Indicator
3	–	NOT USED	16	533 (TN/RD)	Ignition Feed
4	522 (TN/BK)	Left Front Sensor (LOW)	17	–	NOT USED
5	516 (YE/BK)	Right Front Sensor (LOW)	18	–	NOT USED
6	519 (LG/BK)	Rear Sensor (LOW)	19	–	NOT USED
7	994 (WH)	4 Wheel Drive Input	20	–	NOT USED
8	530 (LG/YE)	Ground	21	–	NOT USED
9	532 (OG/YE)	Power (Hot at All Times)	22	–	NOT USED
10	512 (TN/LB)	Brake Fluid Level Input	23	–	NOT USED
11	239 (WH/OG)	ABS Active Output	24	530 (LG/YE)	Ground
12	521 (TN/OG)	Left Front Sensor (HIGH)	25	532 (OG/YE)	Power (Hot at All Times)
13	514 (YE/RD)	Right Front Sensor (HIGH)			

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C228	14-3
C238	62-6
C241	59-8
C243	13-28