C270a

14401

P91
Central Junction
Box (CJB) (14A068)

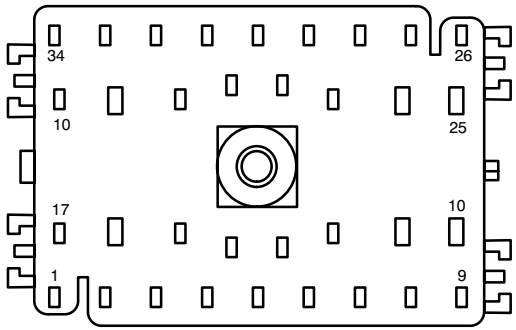

F34007

Pin	Circuit	Circuit function
1	797 (LG/VT)	Voltage supplied at all times (overload protected)
2	797 (LG/VT)	Voltage supplied at all times (overload protected)
3	296 (WH/VT)	Fused accessory relay, switched power, output
4	–	not used
5	12 (LG/BK)	Power, Hot with High Beams on
6	16 (YE/WH)	switched power, Relay, output
7	188 (WH/BK)	Hot with Headlamps on
8	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
9	402 (OG.LG)	Interior lamp relay, feed
10	170 (RD/LB)	Window lockout, switched power, output
11	460 (YE/LB)	Voltage supplied at all times (overload protected)
12	–	not used
13	–	not used
14	3850 (LG/VT)	Engine cooling fan relay, control
15	295 (LB/PK)	Voltage in Run (overload protected)
16	297 (BK/LG)	Voltage in Run or Accessory (overload protected)

Pin	Circuit	Circuit function
17	–	not used
18	391 (RD/YE)	Voltage supplied in Start and Run (overload protected)
19	1040 (RD/BK)	Voltage in Run (overload protected)
20	–	not used
21	–	not used
22	–	not used
23	–	not used
24	40 (LB/WH)	Cigar lighter, feed
25	–	not used
26	–	not used
27	460 (YE/LB)	Voltage supplied at all times (overload protected)
28	40 (LB/WH)	Cigar lighter, feed
29	22 (LB/BK)	Brake feed
30	632 (GY/OG)	Power, Hot with High Beams on
31	1 (DB)	Horn relay, control
32	383 (RD/WH)	Emergency warning flasher, feed
33	53 (BK/LB)	Interior lamp relay, switched power, output
34	417 (P/OG)	Air suspension disable switch, feed