C228 (GY)

19D570

Remote Climate Control (RCC) module

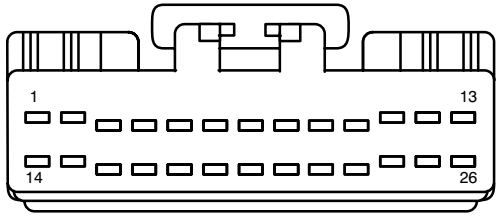

F26015

Pin	Circuit	Circuit function
1	832 (LB/PK)	Audio corporate protocol A
2	833 (TN)	Audio corporate protocol B
3	914 (TN/OG)	SCP Bus +
4	915 (PK/LB)	SCP Bus –
5	436 (RD/LG)	Air temperature door variable resistor +
6	468 (BN)	Sunload sensor (19E663), input
7	788 (RD/OG)	Ambient air temperature sensor (19E702), input
8	570 (BK/WH)	Ground
9	437 (YE/LG)	Air temperature door variable resistor, wiper
10	298 (VT/OG)	Voltage in Run (overload protected)
11	729 (RD/WH)	Voltage supplied at all times (overload protected)
12	–	not used
13	348 (VT)	A/C demand signal
14	275 (YE)	Blower motor relay, control
15	470 (PK/BK)	Sensor signal return (reference/ground)
16	–	not used
17	–	not used
18	–	not used
19	–	not used
20	438 (RD/WH)	Air temperature door variable resistor -
21	249 (DB/LG)	motor drive, CW
22	250 (OG)	motor drive, CCW
23	790 (WH/OG)	In–vehicle temperature sensor (19C734), input
24	776 (OG/BK)	Blower motor speed controller, input
25	–	not used
26	–	not used

C233 (GY)

14401

In–vehicle temperature sensor (19C734)



F03032

Pin	Circuit	Circuit function
1	470 (PK/BK)	Sensor signal return (reference/ground)
2	–	not used
3	790 (WH/OG)	In–vehicle temperature sensor (19C734), input

C243

* with cell phone

19A442/19B113

CD changer (18D806)



F12019

Pin	Circuit	Circuit function
1	832 (LB/PK)	Audio corporate protocol A
2	–	not used
3	694 (BK/LG)	Ground
	*1204 (BK/OG)	
4	–	not used
5	856 (VT)	Radio (18806), to CD changer, Left +
6	690 (GY)	Radio (18806), to CD changer, Right +
7	833 (TN)	Audio corporate protocol B
8	372 (BN/OG)	Audio System ON (ASYSON)
9	720 (RD/YE)	Voltage supplied at all times (overload protected)
10	57 (BK)	Ground
11	798 (LG/RD)	Radio (18806), to CD changer, Left -
12	799 (OG/BK)	Radio (18806), to CD changer, Right -