C241

14401

N10
Rear window defrost switch (18578)



F06088

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	1010 (DB/OG)	Rear window defrost switch (18578), input
4	57 (BK)	Ground
5	235 (RD/BK)	Instrument illumination, input
6	59 (DG/VT)	Fused rear window defrost relay, switched power

C250

14401

N278
Ignition switch (11572)

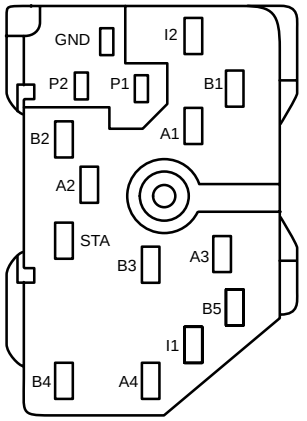

F15009

Pin	Circuit	Circuit function
I2	–	not used
B1	37 (YE)	Voltage supplied at all times (overload protected)
A1	297 (BK/LG)	Voltage in Run or Accessory (overload protected)
P1	512 (TN/LG)	Brake indicator, control
GND	57 (BK)	Ground
P2	–	not used
B2	37 (YE)	Voltage supplied at all times (overload protected)
A2	276 (BN)	Voltage in Run (overload protected)
	489 (PK/BK)	Voltage in Run (overload protected)
STA	32 (RD/LB)	Voltage supplied in Start (overload protected)
B3	–	not used
A3	–	not used
B5	37 (YE)	Voltage supplied at all times (overload protected)
I1	1050 (LG/VT)	Voltage supplied at all times (overload protected)
A4	276 (BN)	Voltage in Run (overload protected)
B4	37 (YE)	Voltage supplied at all times (overload protected)