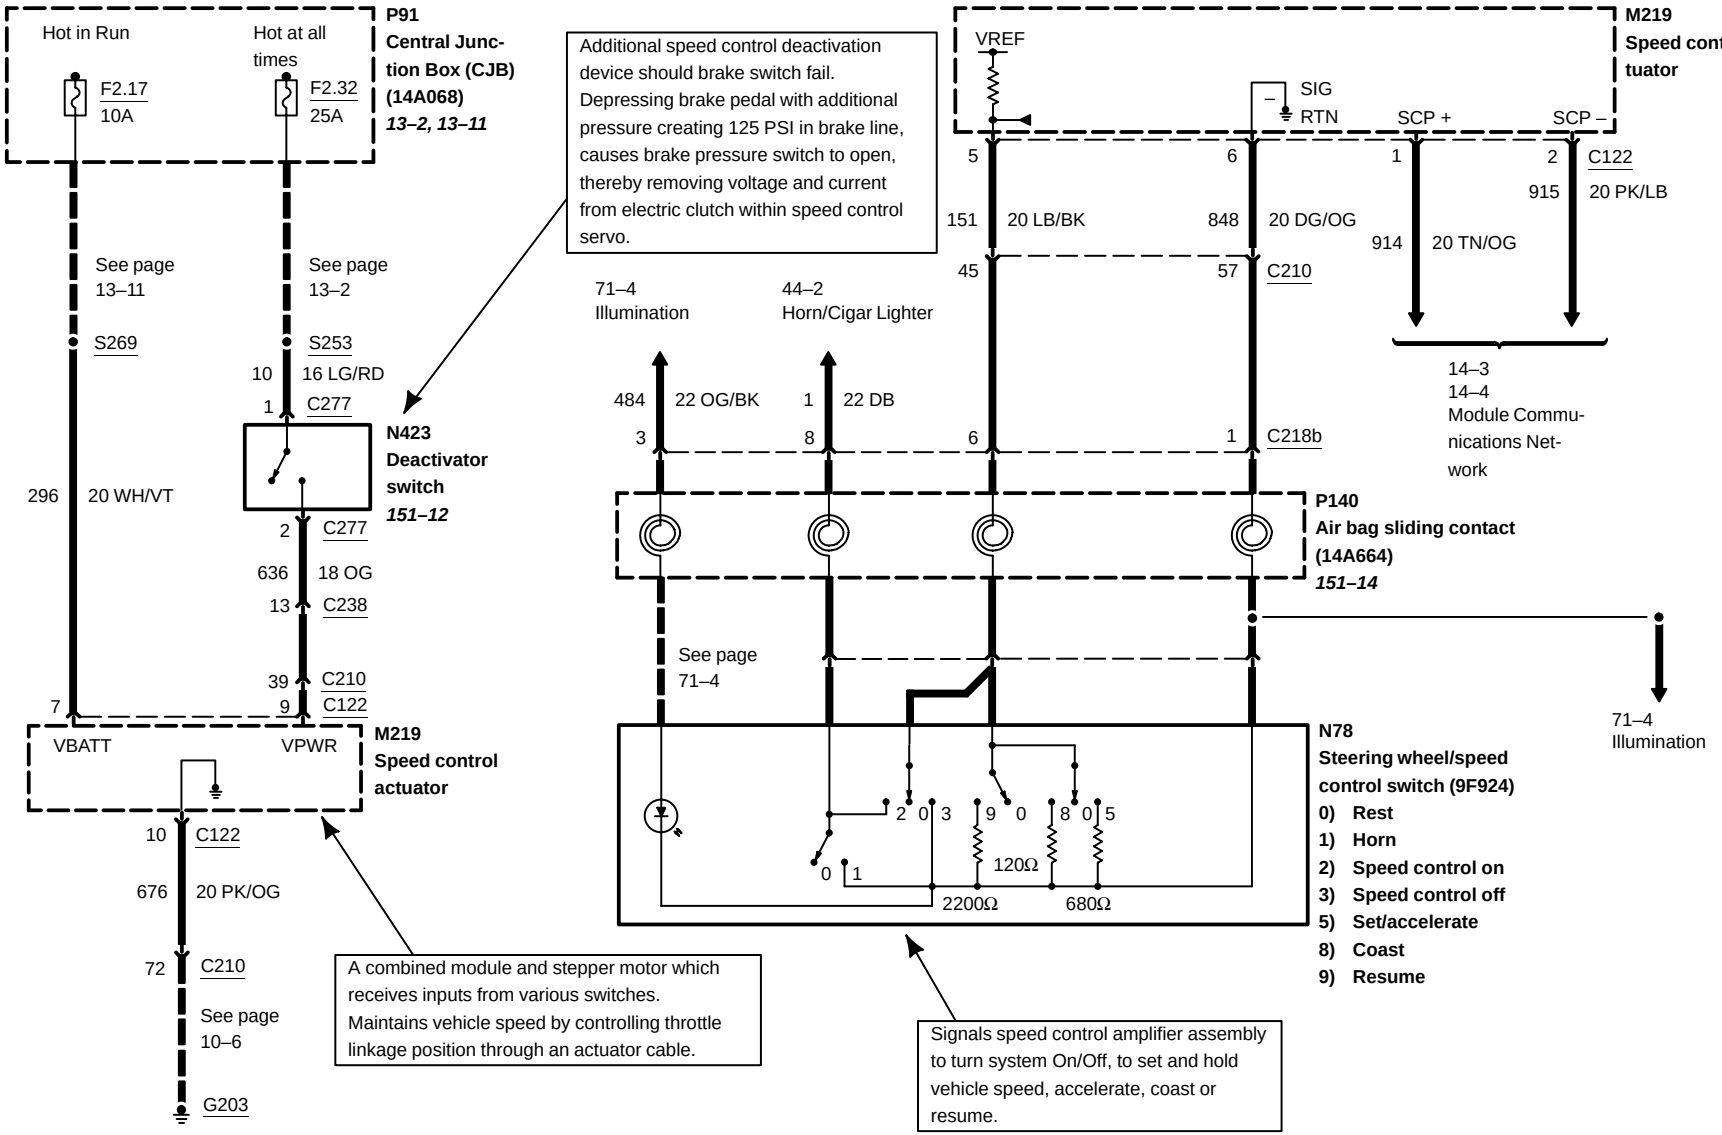
P91
Central Junction Box (CJB)
(14A068)
13–2, 13–11
Hot in Run
Hot at all times
F2.17
10A
F2.32
25A
See page 13–11
See page 13–2
S269
S253
10
16 LG/RD
1
C277
N423
Deactivator switch
151–12
296
20 WH/VT
2
C277
636
18 OG
13
C238
39
C210
7
9
C122
VBATT
VPWR
M219
Speed control actuator
10
C122
676
20 PK/OG
72
C210
See page 10–6
G203
Additional speed control deactivation device should brake switch fail. Depressing brake pedal with additional pressure creating 125 PSI in brake line, causes brake pressure switch to open, thereby removing voltage and current from electric clutch within speed control servo.
A combined module and stepper motor which receives inputs from various switches. Maintains vehicle speed by controlling throttle linkage position through an actuator cable.
M219
Speed control actuator
VREF
SIG RTN
SCP +
SCP –
5
6
1
2
C122
915
20 PK/LB
151
20 LB/BK
848
20 DG/OG
914
20 TN/OG
45
57
C210
14–3
14–4
Module Communications Network
71–4
Illumination
44–2
Horn/Cigar Lighter
484
22 OG/BK
1
22 DB
3
8
6
1
C218b
P140
Air bag sliding contact
(14A664)
151–14
See page 71–4
71–4
Illumination
N78
Steering wheel/speed control switch (9F924)
0) Rest
1) Horn
2) Speed control on
3) Speed control off
5) Set/accelerate
8) Coast
9) Resume
2 0 3 9 0 8 0 5
0 1
120Ω
2200Ω
680Ω
Signals speed control amplifier assembly to turn system On/Off, to set and hold vehicle speed, accelerate, coast or resume.