C228a (WH)

14B242

A205
Electronic Automatic
Temperature Control
(EATC) module
(19980)

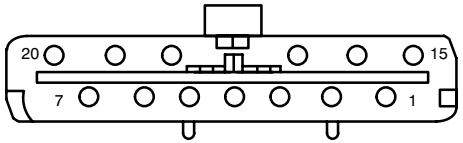

F13017

Pin	Circuit	Circuit Function
1	915 (PK/LB)	SCP Bus –
2	1111 (VT)	Voltage supplied at all times (overload protected)
3	57 (BK)	Ground
4	470 (PK/BK)	Sensor signal return (reference/ground)
5	–	not used
6	776 (OG/BK)	Signal return
7	788 (RD/OG)	Ambient air temperature sensor (19E702), input
15	914 (TN/OG)	SCP Bus +
16	298 (VT/OG)	Voltage in Run (overload protected)
17	364 (BK/LG)	Blower motor relay, control
18	351 (BN/WH)	Reference, voltage
19	–	not used
20	468 (BN)	Sunload sensor (19E663), input

C228b (BK)

14B242

A205
Electronic Automatic
Temperature Control
(EATC) module
(19980)

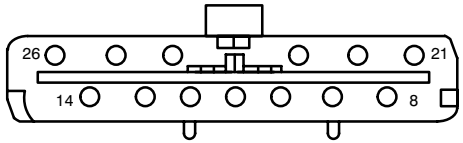

F13017

Pin	Circuit	Circuit Function
8	465 (WH/LB)	Reference, voltage – with steering wheel controls
9	243 (LG/OG)	Temperature blend door actuator (19E616)
10	–	not used
11	–	not used
12	–	not used
13	250 (OG)	Blend door actuator, Ground
14	19 (LB/RD)	Illumination
21	790 (WH/OG)	In–vehicle temperature sensor (19C734), input
22	688 (GY/LB)	Rear window defrost relay, control
23	184 (T/OG)	Blower motor speed controller, signal
24	–	not used
25	–	not used
26	249 (DB/LG)	Blend door actuator, feed