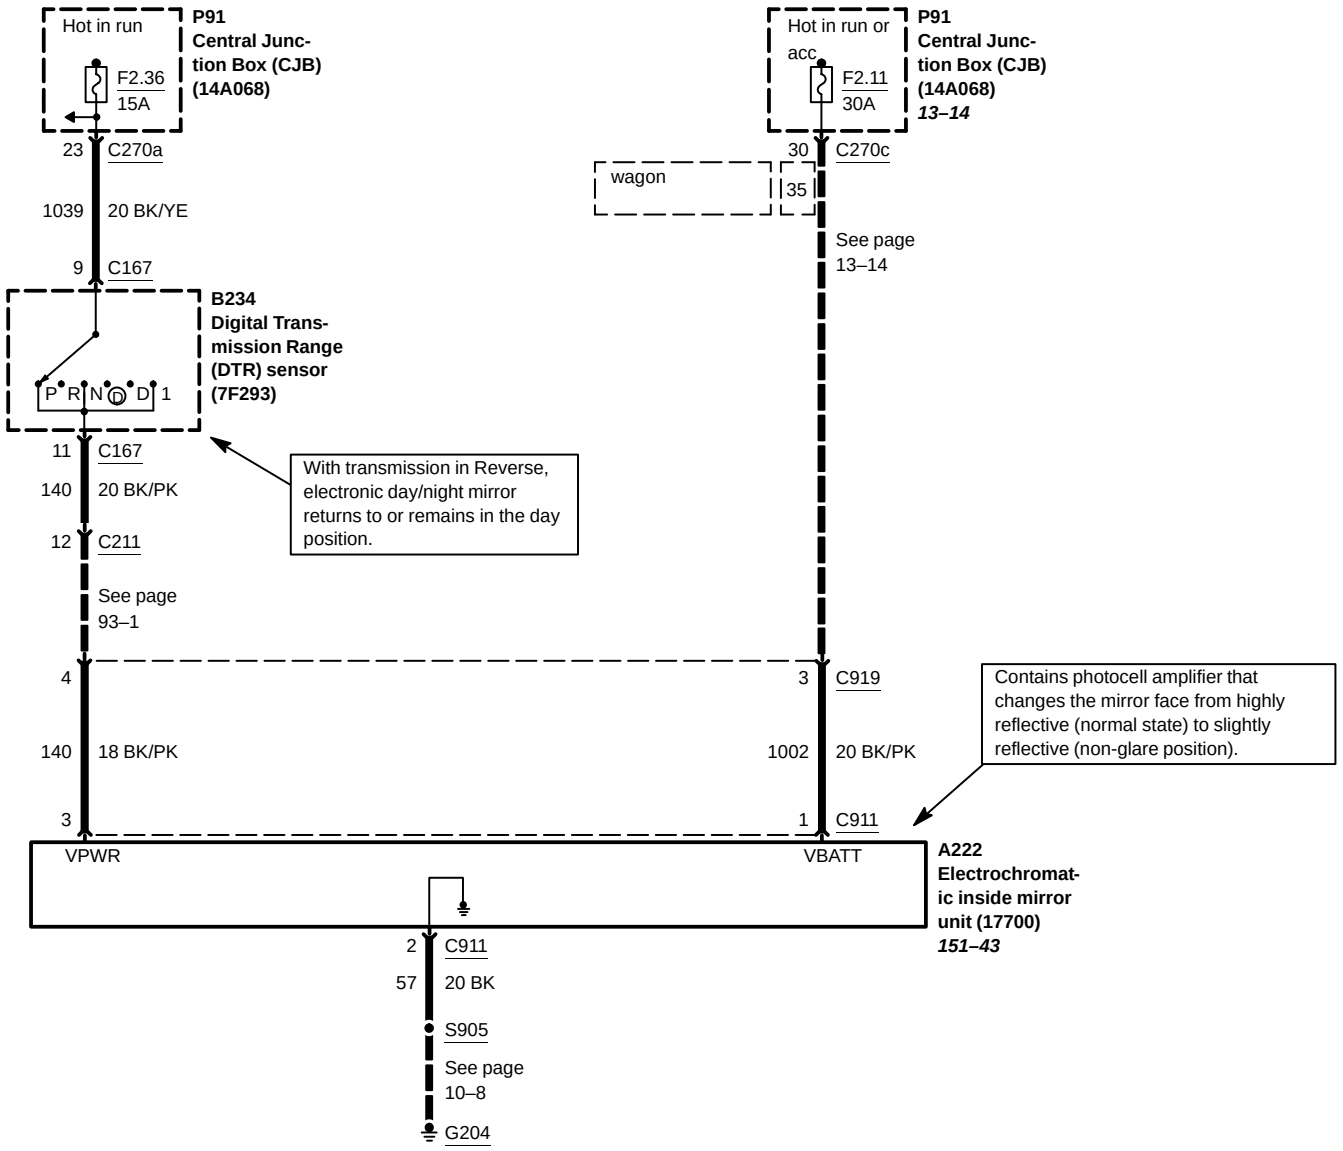
Hot in run
F2.36
15A
P91
Central Junc-
tion Box (CJB)
(14A068)
23
C270a
1039
20 BK/YE
9
C167
B234
Digital Trans-
mission Range
(DTR) sensor
(7F293)
P R N D 1
11
C167
140
20 BK/PK
12
C211
See page
93–1
With transmission in Reverse,
electronic day/night mirror
returns to or remains in the day
position.
Hot in run or
acc
F2.11
30A
P91
Central Junc-
tion Box (CJB)
(14A068)
13–14
30
C270c
wagon
35
See page
13–14
4
140
18 BK/PK
3
3
C919
1002
20 BK/PK
1
C911
Contains photocell amplifier that
changes the mirror face from highly
reflective (normal state) to slightly
reflective (non-glare position).
VPWR
VBATT
A222
Electrochromat-
ic inside mirror
unit (17700)
151–43
2
C911
57
20 BK
S905
See page
10–8
G204