C388a

14A005

A230
Rear Control Unit
(RCU)

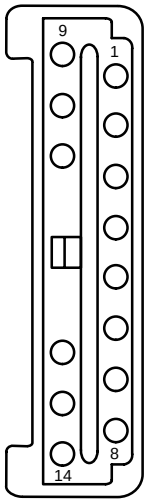

F14015

Pin	Circuit	Circuit function
1	803 (BN/PK)	Speaker, right rear (18808) -
2	802 (OG/RD)	Speaker, right rear (18808) +
3	811 (DG/OG)	Speaker, right front (18808) -
4	805 (WH/LG)	Speaker, right front (18808) +
5	801 (TN/YE)	Speaker, left rear (18808) -
6	800 (GY/LB)	Speaker, left rear (18808) +
7	813 (LB/WH)	Speaker, left front (18808) -
8	804 (OG/LG)	Speaker, left front (18808) +
9	–	not used
10	745 (RD/PK)	Antenna
11	–	not used
12	694 (BK/LG)	Ground
13	694 (BK/LG)	Ground
14	37 (YE)	Voltage supplied at all times (overload protected)

C388b

14A005

A230
Rear Control Unit
(RCU)



F13013

Pin	Circuit	Circuit function
1	832 (LB/PK)	Audio corporate protocol A
2	1068 (LG/BK)	Audio System ON (ASYSON)
3	–	not used
4	–	not used
5	–	not used
6	503 (BN/LG)	Cassette, Left +
7	593 (DB/WH)	Cassette, Right +
15	833 (TN)	Audio corporate protocol B
16	–	not used
17	655 (RD/OG)	Power, Hot in Start with Park or Neutral
18	48	Shield
19	504 (WH/PK)	Cassette, Left -
20	594 (GY)	Cassette, Right -