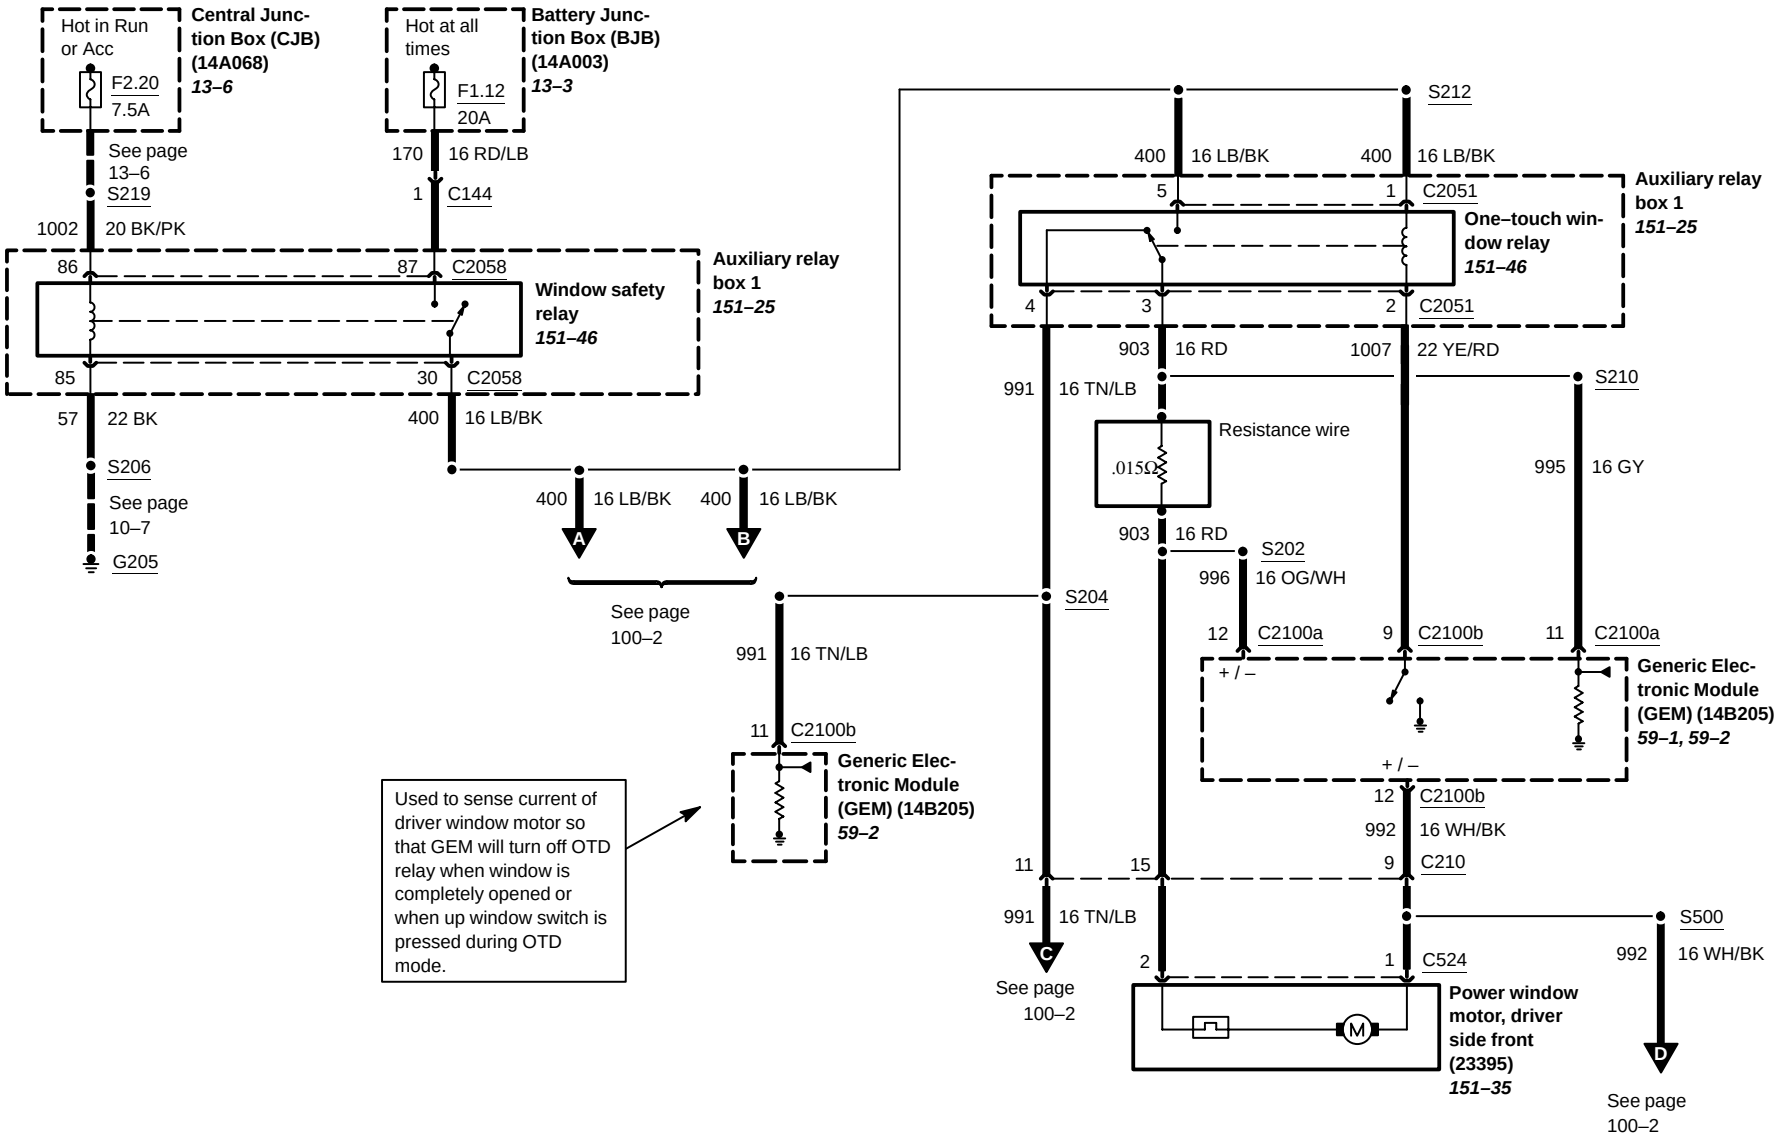
Hot in Run or Acc
F2.20
7.5A
Central Junction Box (CJB) (14A068) 13–6
See page 13–6
S219
1002 20 BK/PK
Hot at all times
F1.12
20A
Battery Junction Box (BJB) (14A003) 13–3
170 16 RD/LB
1 C144
86 87 C2058
85 30 C2058
Window safety relay 151–46
Auxiliary relay box 1 151–25
57 22 BK
400 16 LB/BK
S206
See page 10–7
G205
400 16 LB/BK
400 16 LB/BK
A
B
See page 100–2
S212
400 16 LB/BK
400 16 LB/BK
5 1 C2051
One–touch window relay 151–46
Auxiliary relay box 1 151–25
4 3 2 C2051
903 16 RD
1007 22 YE/RD
991 16 TN/LB
S210
Resistance wire
.015Ω
995 16 GY
903 16 RD
S202
996 16 OG/WH
S204
12 C2100a
9 C2100b
11 C2100a
+ / –
Generic Electronic Module (GEM) (14B205) 59–1, 59–2
991 16 TN/LB
11 C2100b
Generic Electronic Module (GEM) (14B205) 59–2
+ / –
12 C2100b
992 16 WH/BK
9 C210
Used to sense current of driver window motor so that GEM will turn off OTD relay when window is completely opened or when up window switch is pressed during OTD mode.
11 15
991 16 TN/LB
C
See page 100–2
2 1 C524
M
Power window motor, driver side front (23395) 151–35
S500
992 16 WH/BK
D
See page 100–2