C135 (BK)

12A581

ABS control module (2C219)

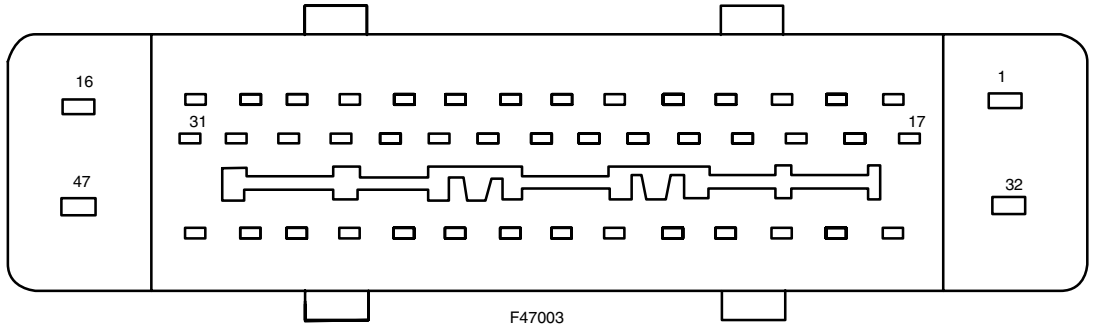

F47003

* with IVD

Pin	Circuit	Circuit function
1	534 (YE/LG)	Voltage supplied at all times (overload protected)
2	70 (LB/WH)	ISO Bus
3	*1572 (DG)	ABS control module (2C219) to Steering position sensor (18B015), input 1
	565 (BN/WH)	Wheel speed sensor, left front (2C205), signal
4	533 (TN/RD)	Voltage supplied in Start and Run (overload protected)
5	1571 (BK)	Sensor signal return (reference/ground)
6	1573 (YE)	ABS control module (2C219) to Steering position sensor (18B015), input 2
7	1574 (DB)	Sensor, Power
8	512 (TN/LG)	Brake fluid level switch (2L414), return
9	531 (DG/YE)	Brake fluid level switch (2L414), signal
10	–	not used
11	1814 (WH/LB)	CAN1 +
12	914 (TN/OG)	SCP Bus +
13	960 (BK/LB)	Traction assist On/Off indicator, to ABS control module
14	915 (PK/LB)	SCP Bus –
15	1815 (PK/LB)	CAN1 –
16	530 (LG/YE)	Chassis Ground
17	1582 (LG/RD)	ABS control module (2C219) to Brake booster sensor, Solenoid +
18	3601 (WH/RD)	Primary brake pressure sensor, Power
19	3603 (RD)	Primary brake pressure sensor, Ground
20	3600 (RD/WH)	Primary brake pressure sensor, signal
21	–	not used
22	565 (BK/WH)	Wheel speed sensor, left front (2C205), signal
23	–	not used

Pin	Circuit	Circuit function
24	1904 (GY/BK)	Secondary brake pressure sensor, Ground
25	1879 (PK/BK)	CAN2 –
26	1902 (RD)	Secondary brake pressure sensor, Power
27	1581 (PK/LB)	ABS control module (2C219) to Brake booster sensor, switch
28	547 (LG/YE)	Brake booster sensor, signal
29	1878 (WH/BK)	CAN2 +
30	1580 (WH/LG)	ABS control module (2C219) to Brake booster sensor, switch
31	1583 (BN/WH)	ABS control module (2C219) to Brake booster sensor, Solenoid –
32	532 (OG/YE)	Voltage supplied at all times (overload protected)
33	516 (YE/BK)	Wheel speed sensor, right front (2C204) –
34	514 (YE/RD)	Wheel speed sensor, right front (2C204) +
35	1787 (RD/LG)	IVD stop lamp relay, control
36	518 (LG/RD)	Wheel speed sensor, left rear +
37	519 (LG/BK)	Wheel speed sensor, left rear –
38	959 (GY)	Traction assist switch, feed, to ABS control module
39	–	not used
40	1905 (GY)	Secondary brake pressure sensor, signal
41	810 (RD/LG)	Brake pedal position switch (13480), output
42	524 (PK/BK)	Wheel speed sensor, right rear –
43	523 (RD/PK)	Wheel speed sensor, right rear +
44	1791 (RD)	output to Trailer electronic brake control module
45	521 (TN/OG)	Wheel speed sensor, left front (2C205) +
46	522 (TN/BK)	Wheel speed sensor, left front (2C205) –
47	530 (LG/YE)	Chassis Ground