-6

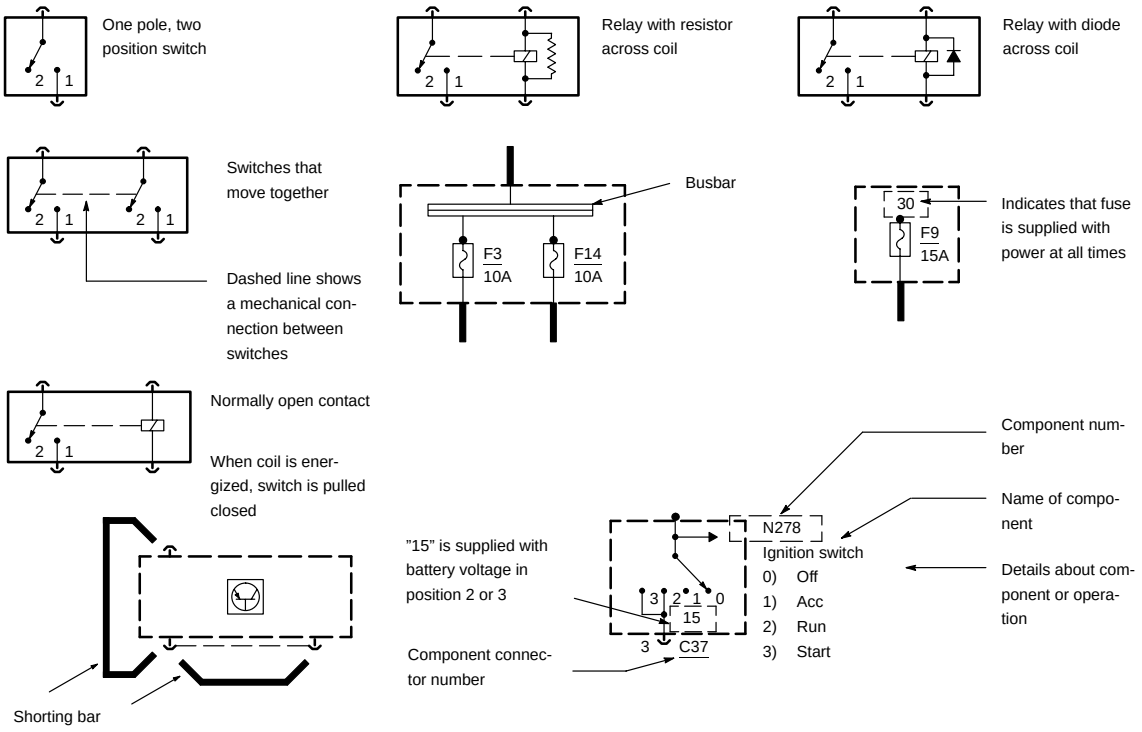
One pole, two position switch
Relay with resistor across coil
Relay with diode across coil
Switches that move together
Busbar
Indicates that fuse is supplied with power at all times
F3 10A
F14 10A
30
F9 15A
Dashed line shows a mechanical connection between switches
Normally open contact
When coil is energized, switch is pulled closed
Component number
Name of component
Details about component or operation
”15” is supplied with battery voltage in position 2 or 3
N278
Ignition switch
0) Off
1) Acc
2) Run
3) Start
Component connector number
C37
Shorting bar