C128 (BK)

14290

Mass Air Flow (MAF) sensor (12B579)

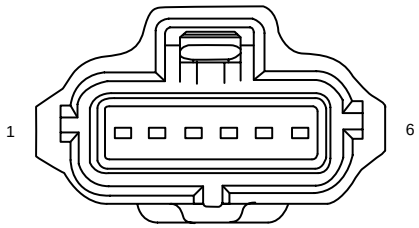

F06279

Pin	Circuit	Circuit function
1	359 (GY/RD)	signal, return
2	361 (RD)	Voltage supplied in Start and Run (overload protected)
3	570 (BK/WH)	Ground
4	968 (TN/LB)	Mass Air Flow (MAF) sensor (12B579) signal return
5	967 (LB/RD)	Mass Air Flow (MAF) sensor (12B579) output
6	743 (GY)	Intake Air Temperature (IAT) sensor (12A697) input

C131 (BK)

14290

Horn (13832)



F02337

Pin	Circuit	Circuit function
1	57 (BK)	Ground
2	6 (YE/LG)	Horn relay switched power output

C132

14290

Ambient air temperature sensor (19E702)



F02559

Pin	Circuit	Circuit function
1	767 (LB/OG)	Ambient air temperature sensor (19E702), feed
2	470 (PK/BK)	Sensor signal return (reference/ground)

C133 (BK)

12B637



F08052

(1) 33 (WH/PK)
(2) 140 (BK/PK)
(3) 1143 (WH/BK)
(4) 1144 (YE/BK)
(5) –
(6) 391 (RD/YE)
(7) 295 (LB/PK)
(8) 1145 (LB/BK)

7C078



F08259

(1) 33 (WH/PK)
(2) 140 (BK/PK)
(3) 1143 (WH/BK)
(4) 1144 (YE/BK)
(5) –
(6) 391 (RD/YE)
(7) 298 (VT/OG)
(8) 1145 (LB/BK)