C167

12B637

B234
Digital Transmission Range (DTR) sensor (7F293)

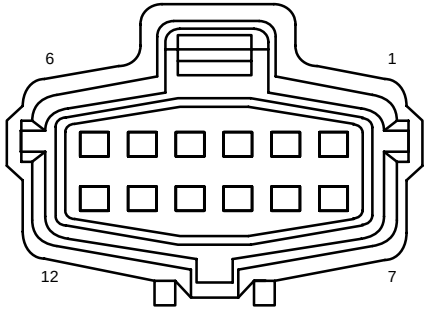

F12040

Pin	Circuit	Circuit function
1	–	not used
2	359 (GY/RD)	signal, return
3	199 (LB/YE)	Digital Transmission Range (DTR) sensor, TR3A
4	1144 (YE/BK)	Digital Transmission Range (DTR) sensor, TR1
5	1145 (LB/BK)	Digital Transmission Range (DTR) sensor, TR2
6	1143 (WH/BK)	Digital Transmission Range (DTR) sensor, TR4
7	57 (BK)	Ground
8	463 (RD/WH)	Neutral, switch sense, input
9	298 (VT/OG)	Voltage in Run (overload protected)
10	1093 (TN/RD)	Power, Hot in Start with Park or Neutral
11	140 (BK/PK)	Voltage supplied in reverse
12	329 (PK)	Voltage supplied in Start (overload protected)

C169

12B637

N19
Reversing lamps switch



Pin	Circuit	Circuit function
1	140 (BK/PK)	Voltage supplied in reverse
2	298 (VT/OG)	Voltage in Run (overload protected)

C171 (GY)

12B637

B48
Heated Oxygen Sensor (HO2S) #11 (9F472)



F04075

Pin	Circuit	Circuit function
1	387 (RD/WH)	Heated Oxygen Sensor (HO2S) #11 (9F472), heater
2	34 (LB/OG)	Voltage supplied in Start and Run (overload protected)
3	74 (GY/LB)	Heated Oxygen Sensor (HO2S) #11 (9F472), input
4	89 (OG)	signal, return

C172 (GY)

12B637

B47
Heated Oxygen Sensor (HO2S) #21 (9F472)



F04075

Pin	Circuit	Circuit function
1	388 (YE/LB)	Heated Oxygen Sensor (HO2S) #21 (9F472), heater
2	34 (LB/OG)	Voltage supplied in Start and Run (overload protected)
3	94 (RD/BK)	Heated Oxygen Sensor (HO2S) #21 (9F472), input
4	89 (OG)	signal, return