C135 (BK)

14290

ABS control module
(2C219)

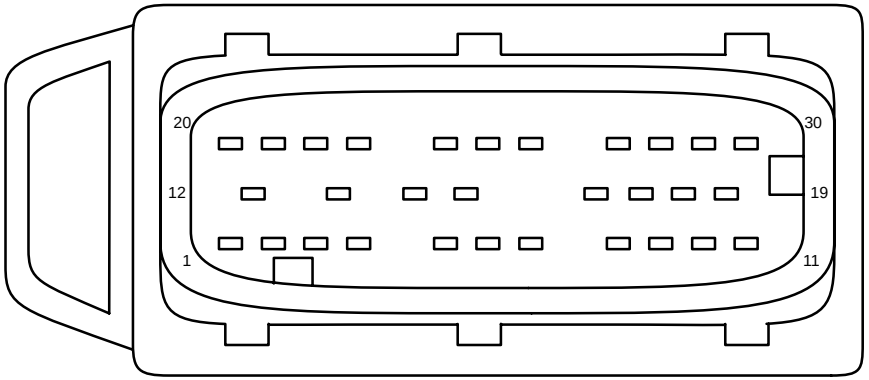

F30003

Pin	Circuit	Circuit function
1	–	not used
2	523 (RD/PK)	Wheel speed sensor, right rear +
3	524 (PK/BK)	Wheel speed sensor, right rear -
4	514 (YE/RD)	Wheel speed sensor, right front (2C204) +
5	516 (YE/BK)	Wheel speed sensor, right front (2C204) -
6	810 (RD/LG)	Brake pedal position switch (13480), input
7	–	not used
8	1087 (OG)	Voltage in Run (overload protected)
9	1412 (WH/PK)	Traction control override, input
10	–	not used
11	–	not used
12	57 (BK)	Ground
13	532 (OG/YE)	Voltage supplied at all times (overload protected)
14	533 (TN/RD)	Voltage supplied at all times (overload protected)
15	651 (BK/YE)	Ground

Pin	Circuit	Circuit function
16	22 (LB/BK)	Brake feed
17	959 (GY)	Traction assist switch, feed, to ABS control module
18	960 (BK/LB)	Traction assist On/Off indicator, to ABS control module
19	–	not used
20	521 (TN/OG)	Wheel speed sensor, left front (2C205) +
21	522 (TN/BK)	Wheel speed sensor, left front (2C205) -
22	518 (LG/RD)	Wheel speed sensor, left rear +
23	519 (LG/BK)	Wheel speed sensor, left rear -
24	70 (LB/WH)	ISO Bus
25	603 (DG)	Anti–lock brake indicator, control
26	–	not used
27	–	not used
28	–	not used
29	915 (PK/LB)	SCP Bus -
30	914 (TN/OG)	SCP Bus +