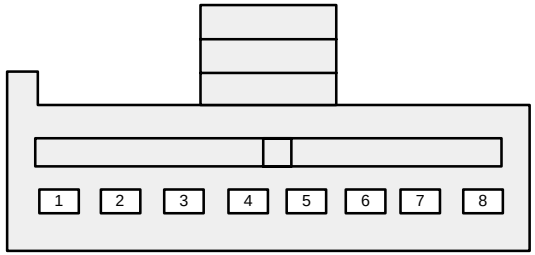

C232

HYDRO-MAX MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
1	855 (VT)	Hydro-Max Flow Switch Input
2	977 (VT/WH)	Warning Indicator Control
3	886 (BU)	Hydro-Max Motor Indicator and Tone Control
4	1203 (BK/LB)	Ground
5	275 (YE)	Hydro-Max Relay Control
6	693 (BN)	Hydro-Max Motor Monitor
7	640 (RD/YE)	Power (Hot in Start or Run)
8	810 (RD/LG)	Brake Applied Input



C187

HYDRO-MAX RELAY

PIN	CIRCUIT	CIRCUIT FUNCTION
30	725 (PK)	Power (Hot at All Times)
85	855 (LB)	Hydro-Max Relay Control
86	275 (YE)	Hydro-Max Relay Control
87	461(OG)	Feed to Hydro-Max Motor
87A	–	NOT USED

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C250a	60-8
C250c	60-7