

C261

RADIO

PIN	CIRCUIT	CIRCUIT FUNCTION
1	–	NOT USED
2	–	NOT USED
3	–	NOT USED
4	–	NOT USED
5	1068 (LG/BK)	Audio System ON
6	832 (LB/PK)	Audio Communication Network
7	833 (TN)	Audio Communication Network
8	–	NOT USED
9	679 (GY/BK)	Vehicle Speed Signal
10	723 (GY/RD)	Audio to Cellular Phone
11	724 (LB/YE)	Audio to Cellular Phone (–)
12	725 (VT)	Audio to Cellular Phone (+)
13	48	Audio Shield
14	595 (LB/RD)	Radio Receiver to Redundant Radio Control
15	–	NOT USED
16	48	Audio Shield
17	690 (GY)	CD – Right Channel Signal IN
18	799 (OG/BK)	CD – Right Channel Signal OUT
19	856 (VT)	CD – Left Channel Signal IN
20	798 (LG/RD)	CD – Left Channel Signal OUT

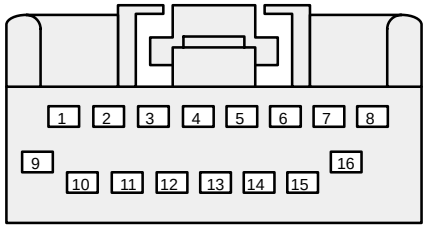

* W/PREMIUM RADIO
** W/SUPER SOUND

C262

RADIO

PIN	CIRCUIT	CIRCUIT FUNCTION
1	19	Instrument Panel Lamps Feed
2	57 (BK)	Ground
3	1000 (RD/BK)	Fused Ignition “Start”
4	57 (BK)	Ground (Navigator)
5	802 (OG/RD)	RR Speaker Signal (+)
6	803 (BN/PK)	RR Speaker Signal (–)
7	805 (WH/LG)	RF Speaker Signal (+)
8	811 (DG/OG)	RF Speaker Signal (–)
9	797 (LG/VT)	Battery Feed to Radio
10	*1002 (BK/PK)	Fused Ignition “Run/Accesory”
	**1499	Fused Delay Accesory Power
11	694 (BK/LG)	Ground
12	800 (GY/LB)	LR Speaker Signal (+)
13	801 (TN/YE)	LR Speaker Signal (–)
14	804 (OG/LG)	LF Speaker Signal (+)
15	813 (LB/WH)	LF Speaker Signal (–)
16	694 (BK/LG)	Ground