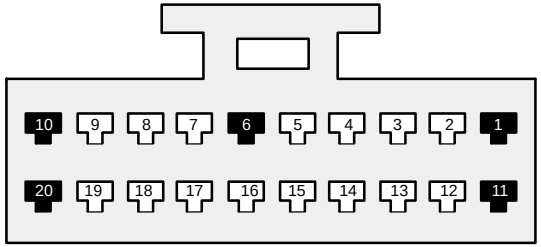

C928

OVERHEAD TRIP COMPUTER (OTC) MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
1	–	NOT USED
2	702 (WH/BK)	Compass Data (+)
3	703 (WH/OG)	Compass Data (–)
4	71 (OG/LG)	Data Output LInk
5	679 (GY/BK)	Vehicle Speed Sensor (+)
6	–	NOT USED
7	53 (BK/LB)	Power
8	434 (LB/BK)	Main Light (DC Output)
9	705 (LG/OG)	Battery Saver Lamp Feed
10	–	NOT USED
11	–	NOT USED
12	729 (RD/WH)	Power (Hot at All Times)
13	875 (BK/LB)	Ground
14	1003 (GY/YE)	Power (Hot in Run)
15	29 (YE/WH)	Fuel Tank Sender
16	204 (LG)	Ground
17	900 (BK)	AWD Low Input
18	403 (LG/VT)	Right Map/Interior Feed
19	401 (PK)	Left Map/Interior Feed
20	–	NOT USED

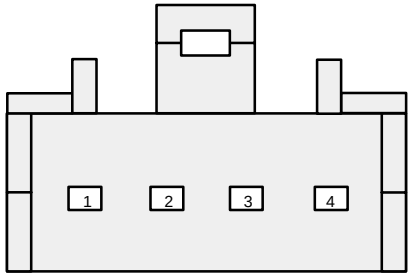

C905

COMPASS SENSOR

PIN	CIRCUIT	CIRCUIT FUNCTION
1	875 (BK/LB)	Ground
2	1003 (GY/YE)	Power (Hot in Run)
3	703 (WH/OG)	Compass Data (–)
4	702 (WH/BK)	Compass Data (+)

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C174	24-9, 25-9
C238	62-6
C242	13-29
C295	41-5