C167 (BK)

12B637

Digital Transmission Range (DTR) sensor (7F293)

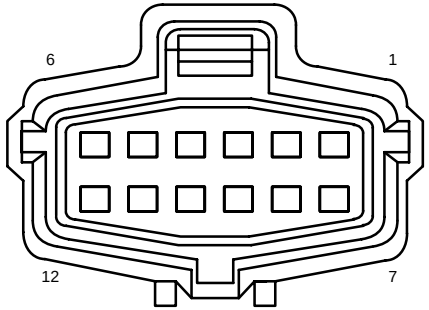

F12040

Pin	Circuit	Circuit function
1	–	not used
2	359 (GY/RD)	signal, return
3	199 (LB/YE)	Digital Transmission Range (DTR) sensor, TR3A
4	1144 (YE/BK)	Digital Transmission Range (DTR) sensor, TR1
5	1145 (LB/BK)	Digital Transmission Range (DTR) sensor, TR2
6	1143 (WH/BK)	Digital Transmission Range (DTR) sensor, TR4
7	57 (BK)	Ground
8	463 (RD/WH)	Neutral, switch sense, input
9	298 (VT/OG)	Voltage in Run (overload protected)
10	1093 (TN/RD)	Power, Hot in Start with Park or Neutral
11	140 (BK/PK)	Voltage supplied in reverse
12	329 (PK)	Voltage supplied in Start (overload protected)

C168 (BK)

12B637

5R44E Transmission

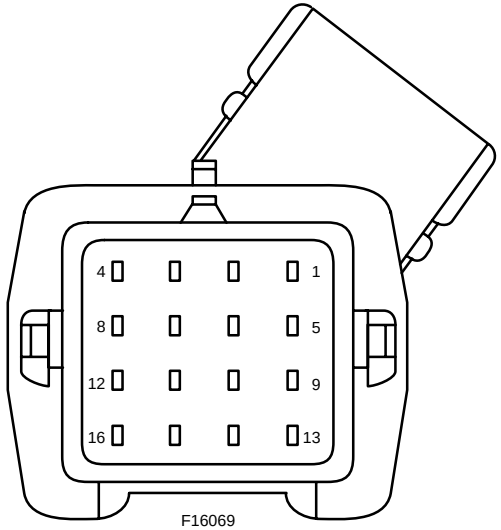

F16069

Pin	Circuit	Circuit function
1	34 (LB/OG)	Voltage supplied in Start and Run (overload protected)
2	970 (DG/WH)	Turbine shaft speed sensor (7M101)
3	359 (GY/RD)	signal, return
4	923 (OG/BK)	Transmission Fluid Temperature (TFT) sensor, input
5	480 (VT/YE)	Torque Converter Clutch (TCC) solenoid
6	–	not used
7	971 (PK/BK)	Shift solenoid C
8	359 (GY/RD)	signal, return
9	924 (BN/OG)	Shift solenoid D
10	34 (LB/OG)	Voltage supplied in Start and Run (overload protected)
11	34 (LB/OG)	Voltage supplied in Start and Run (overload protected)
12	925 (WH/YE)	Electronic Pressure Control (EPC) solenoid
13	–	not used
14	315 (VT/OG)	Shift solenoid B
15	–	not used
16	237 (OG/YE)	Shift solenoid A