C2188a (BK)

14401

Radio (18806)

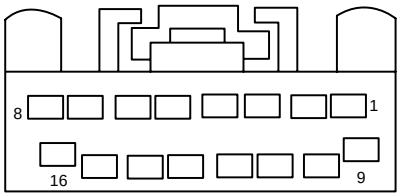

F16131

Pin	Circuit	Circuit function
1	19 (LB/RD)	Instrument illumination, feed
2	57 (BK)	Ground
3	1000 (RD/BK)	Voltage supplied in Start (overload protected)
4	–	not used
5	802 (OG/RD)	Speaker, right rear (18808) +
6	803 (BN/PK)	Speaker, right rear (18808) –
7	805 (WH/LG)	Speaker, right front (18808) +
8	811 (DG/OG)	Speaker, right front (18808) –
9	729 (RD/WH)	Voltage supplied at all times (overload protected)
10	137 (YE/BK)	Voltage in Run or Accessory (overload protected)
11	694 (BK/LG)	Ground
12	800 (GY/LB)	Speaker, left rear (18808) +
13	801 (TN/YE)	Speaker, left rear (18808) +
14	804 (OG/LG)	Speaker, left front (18808) +
15	813 (LB/WH)	Speaker, left front (18808) –
16	694 (BK/LG)	Ground

C2188b (BK)

14401

Radio (18806)

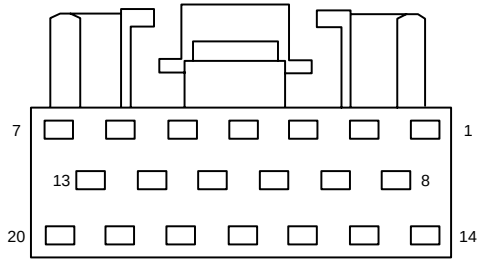

F20023

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	–	not used
4	–	not used
5	1068 (LG/BK)	Audio System ON (ASYSON)
6	832 (LB/PK)	Audio corporate protocol A
7	833 (TN)	Audio corporate protocol B
8	–	not used
9	–	not used
10	–	not used
11	–	not used
12	–	not used
13	–	not used
14	–	not used
15	–	not used
16	48 (BK)	Shield
17	1561 (OG)	Rear Seat Entertainment (RSE) module, to, Radio (18806), Right +
18	1562 (YE)	Rear Seat Entertainment (RSE) module, to, Radio (18806), Right –
19	1559 (RD)	Rear Seat Entertainment (RSE) module, to, Radio (18806), Left +
20	1560 (WH)	Rear Seat Entertainment (RSE) module, to, Radio (18806), Left –