C349

14B079

P87
Rear Integrated
Control Panel
(RICP) (19980)

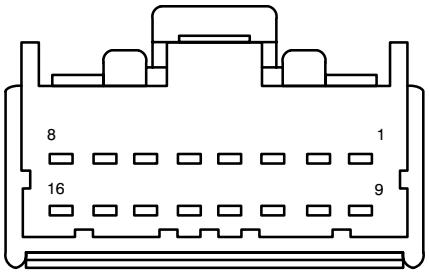

F16118

Pin	Circuit	Circuit function
1	19 (LB/RD)	Instrument illumination
2	57 (BK)	Ground, Illumination
3	694 (BK/LG)	Ground
4	–	not used
5	802 (OG/RD)	Speaker, right rear (18808) +
6	803 (BN/PK)	Speaker, right rear (18808) –
7	800 (GY/LB)	Speaker, left rear (18808) +
8	801 (TN/YE)	Speaker, left rear (18808) –
9	797 (LG/VT)	Voltage supplied at all times (overload protected)
10	1068 (LG/BK)	Audio System ON (ASYSON)
11	–	not used
12	833 (TN)	Audio corporate protocol B
13	832 (LB/PK)	Audio corporate protocol A
14	–	not used
15	827 (TN/WH)	Speaker, left rear (18808) +
16	825 (TN/LG)	Speaker, right rear (18808) +

C350

7A786

A257
Transfer case as-
sembly



F16067

Pin	Circuit	Circuit function
1	770 (WH)	Motor position 3
2	–	not used
3	–	not used
4	–	not used
5	771 (VT/YE)	Motor position 4
6	–	not used
7	–	not used
8	–	not used
9	764 (BN/WH)	Motor position 2
10	762 (YE/WH)	signal, return
11	–	not used
12	–	not used
13	763 (OG/WH)	Motor position 1
14	778 (OG)	Four–wheel drive control module, to, Transfer case as-sembly
15	777 (YE)	Four–wheel drive control module, to, Transfer case as-sembly
16	779 (BN)	Four–wheel drive control module, to, Differential lock solenoid