Monitors the brake on/off switch and the four wheel speed sensors to determine when the anti-lock brake system should be engaged.

REVISED

* W/IVD

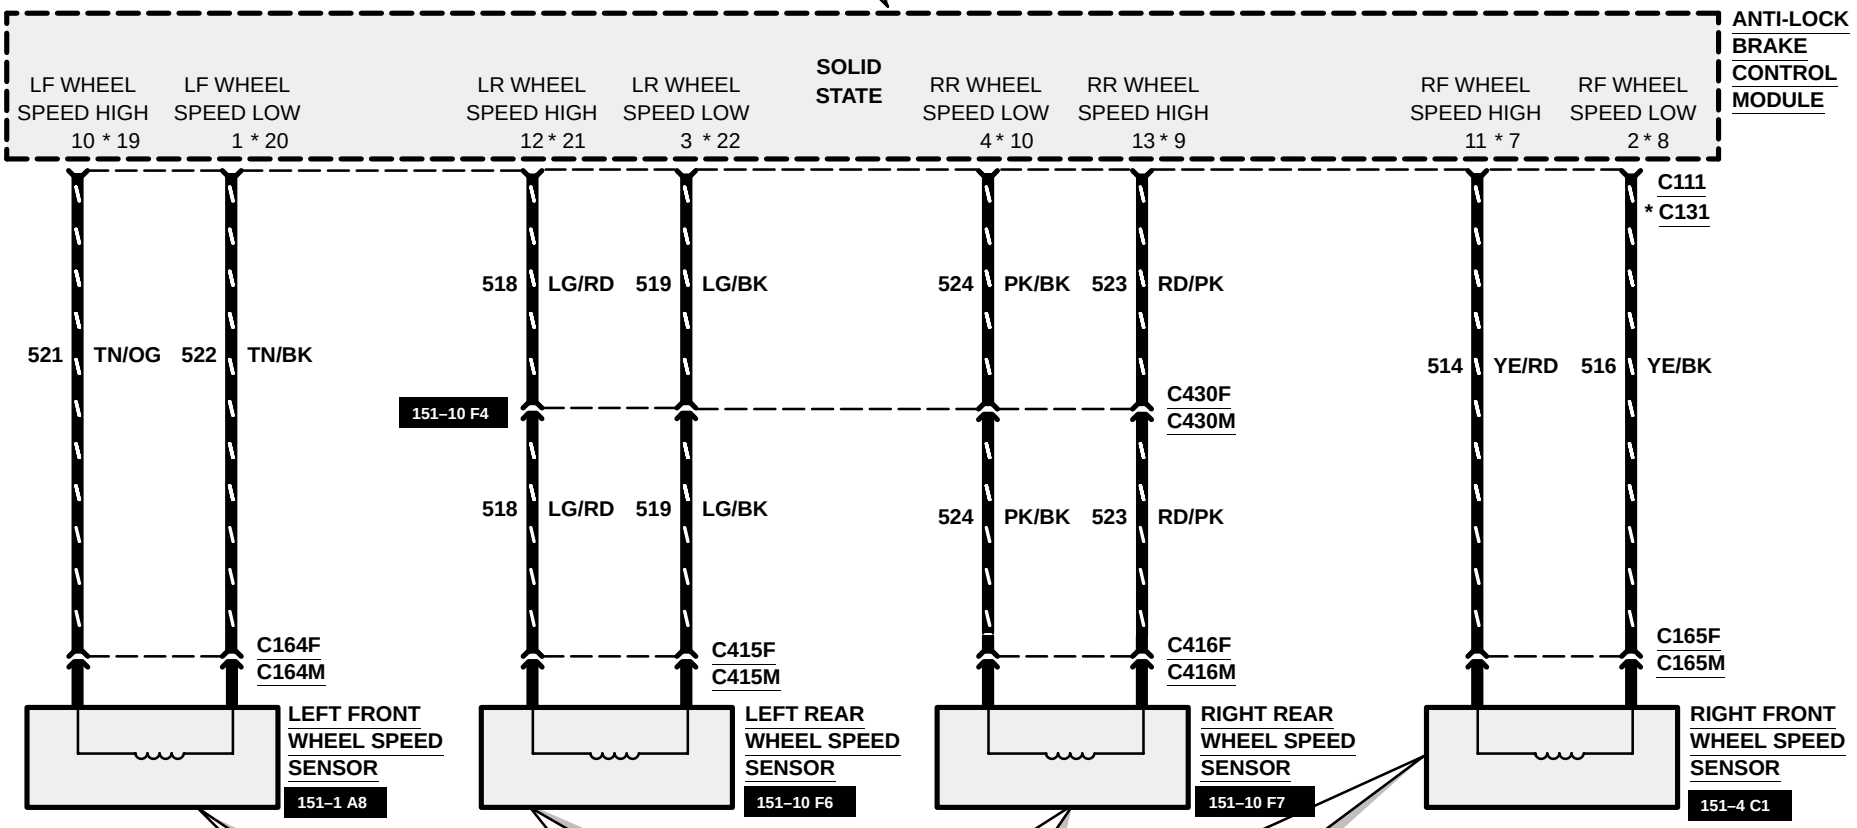

A variable reluctance sensor and toothed speed indicator ring used to determine wheel speed. As ring teeth pass by reluctance sensor, a pulsing voltage signal is generated and sent to anti-lock brake control module. Voltage pulses are directly proportional to rotational wheel speed.