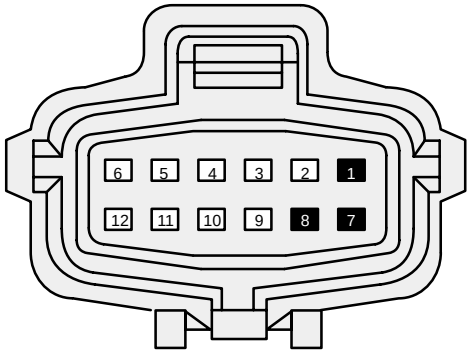

C180 (BLACK)

DIGITAL TRANSMISSION RANGE (DTR) SENSOR

PIN	CIRCUIT	CIRCUIT FUNCTION
1	–	NOT USED
2	359 (GY/RD)	Sensor Signal Return
3	199 (LB/YE)	TR3A
4	1012 (OG/BK)	TR1
5	972 (BK/WH)	TR2
6	944 (DG/OG)	TR4
7	–	NOT USED
8	–	NOT USED
9	1040 (RD/BK)	Power (Hot in Run)
10	1290 (WH/OG)	Starter Control
11	140 (BK/PK)	Reversing Lamps
12	1093 (TN/RD)	Starter Motor Relay



C179 (NEUTRAL)

AX4N TRANSAXLE

PIN	CIRCUIT	CIRCUIT FUNCTION
1	237 (OG/YE)	Shift Solenoid A
2	276 (BN)	Power (Hot in Start and Run)
3	125 (DB/WH)	Torque Converter Clutch (TCC) Solenoid
4	–	NOT USED
5	923 (OG/BK)	Transmission Fluid Temperature (TFT) Sensor
6	315 (VT/OG)	Shift Solenoid B
7	276 (BN)	Power (Hot in Start and Run)
8	971 (PK/BK)	Shift Solenoid C
9	359 (GY/RD)	Signal Return
10	925 (WH/YE)	Electronic Pressure Control (EPC) Solenoid