42-1 ANTI-LOCK BRAKE SYSTEM

2001 F53

For diagnostic information, refer to Section 206-09 of the Workshop Manual.

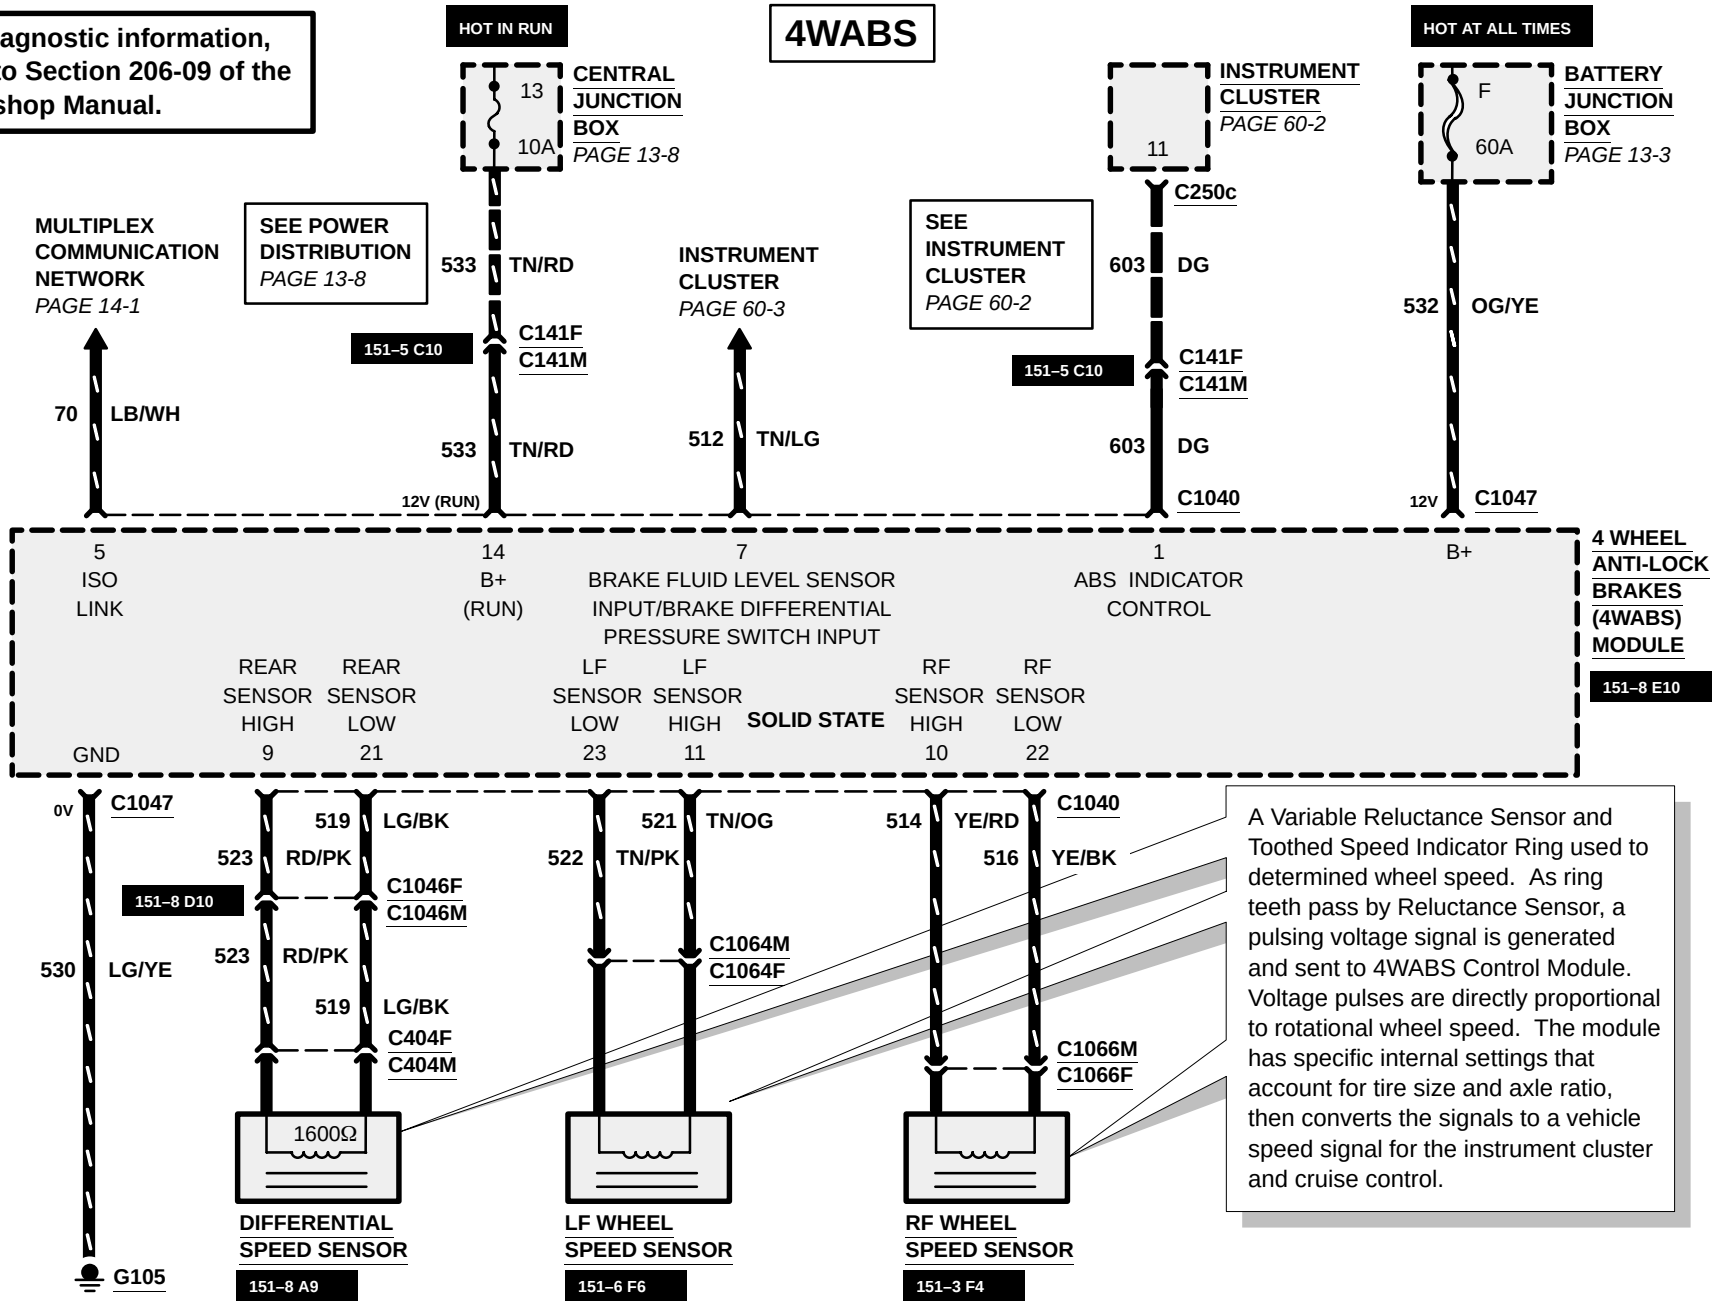

A Variable Reluctance Sensor and Toothed Speed Indicator Ring used to determined wheel speed. As ring teeth pass by Reluctance Sensor, a pulsing voltage signal is generated and sent to 4WABS Control Module. Voltage pulses are directly proportional to rotational wheel speed. The module has specific internal settings that account for tire size and axle ratio, then converts the signals to a vehicle speed signal for the instrument cluster and cruise control.