59-11 MULTIFUNCTION ELECTRONIC CONTROL MODULES

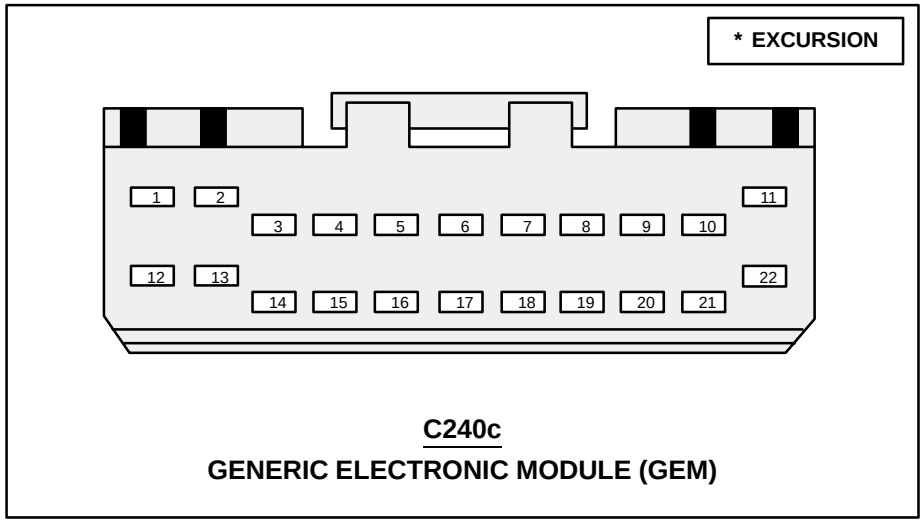

C240c

GENERIC ELECTRONIC MODULE (GEM)

REVISED

PIN	CIRCUIT	CIRCUIT FUNCTION
1	463 (RD/WH)	Neutral Sense Input
2	700 (WH/VT)	Liftgate Ajar Input
3	780 (DB)	4 Wheel Drive Mode Switch Input
4	465 (WH/LB)	4 Wheel Drive Mode Switch Reference (Ground)
5	976 (OG)	Encoder Power Output
6	605 (RD)	4x2 Center Axle Solenoid Control
7	145 (GY/BK)	4x4 Center Axle Solenoid Control
8	975 (BN/YE)	4x4 Low Range Indicator Control
9	210 (LB)	4x4 High Range Indicator Control
10	782 (BN/WH)	Low to High Relay Control
11	781 (OG/LB)	High to Low Relay Control
12	810 (RD/LG)	Brake Pedal Position (BPP) Switch Input
13	119 (PK/YE)	All Door Lock Relay Output
14	120 (PK/LG)	All Door Unlock Relay Output
15	771 (VT/YE)	Contact Plate A
16	763 (OG/WH)	Contact Plate D
17	764 (BN/WH)	Contact Plate B
18	770 (WH)	Contact Plate C
19	* 591 (LG)	Rear Wiper Relay Control
20	7 (LG/YE)	Park Lamp Flash Relay Output
21	164 (VT/LB)	Driver Door Lock Relay Output
22	*488 (DG)	Rear Washer Relay Control