C290b

14401

A11
Radio (18806)

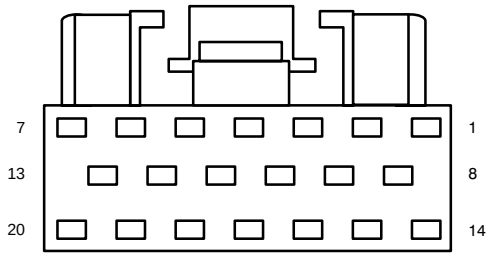

F20023

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	–	not used
4	–	not used
5	1068 (LG/BK)	Audio System ON (ASYSON)
6	832 (LB/PK)	Audio corporate protocol A
7	833 (TN)	Audio corporate protocol B
8	–	not used
9	–	not used
10	723 (GY/RD)	Cellular phone, wake up
11	724 (LB/YE)	Radio (18806), to cellular phone, audio –
12	725 (PK)	Radio (18806), to cellular phone, audio +
13	48	Shield
14	–	not used
15	–	not used
16	48	Shield
17	1561 (OG)	Rear Seat Entertainment (RSE) module, to, Radio (18806), Right, +
18	1562 (YE)	Rear Seat Entertainment (RSE) module, to, Radio (18806), Right, –
19	1559 (RD)	Rear Seat Entertainment (RSE) module, to, Radio (18806), Left, +
20	1560 (WH)	Rear Seat Entertainment (RSE) module, to, Radio (18806), Left, –

C293

18B574

M204
Front blower motor
resistor assembly



F04074

Pin	Circuit	Circuit function
1	269 (LB/OG)	Heater blower motor (19805), to, Heater blower switch
2	261 (OG/BK)	Blower motor, to switch – High
3	1205 (BK)	Ground
4	260 (RD/OG)	Blower motor relay, control

C294a

14401

P82
Function selector
switch assembly,
front



F12077

Pin	Circuit	Circuit function
1	1418 (LB/WH)	Illumination, output
2	1205 (BK)	Ground
3	687 (GY/YE)	Temperature position sense, signal
4	1422 (DB/OG)	rear, Blend door actuator
5	1423 (WH/BK)	to Rear blower motor switch (front), switch sense
6	1205 (BK)	Ground
7	1425 (GY/WH)	Air conditioning, On, indicator
8	1424 (TN/BK)	Air conditioning, switch
9	1410 (TN/OG)	switch, return
10	1426 (PK)	Rear window defrost, switch
11	1427 (TN/LB)	Rear window defrost, On, indicator
12	1040 (RD/BK)	Voltage in Run (overload protected)