C200

IP Harness

Central Junction Box (CJB)

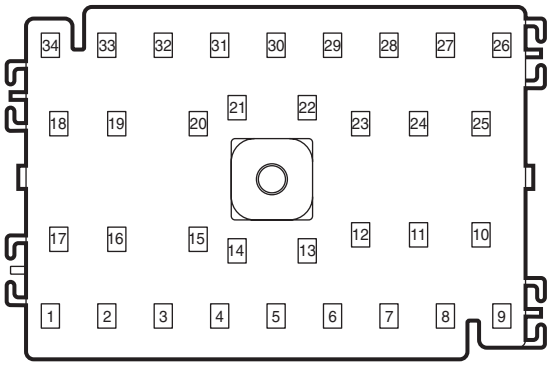

3577200C1

Pin	Circuit	Circuit Function
1	797 (LG/VT)	Fused power to warning lamp
2	797 (LG/VT)	Fused power to warning lamp
3	296 (WH/VT)	Fused accessory feed
4	59 (DG/VT)	Heated exterior mirror feed
5	12 (LG/BK)	Fused power to high beams
6	16 (RD/LG)	Fused run/start output
7	1045 (DB/WH)	Illumination lamps feed
8	1002 (BK/PK)	Fused ignition "run/accessory" to module, GEM-input
9	402 (OG/LG)	Relay, interior lamp - dome lamp switch
10	170 (RD/LB)	Window regulator switch feed
11	460 (YE/LB)	Horn relay feed
12	—	Not used
13	—	Not used
14	23 (TN/LG)	Fused run output
15	295 (LB/PK)	Fused run feed
16	297 (BK/LG)	Fused run/accessory feed to secondary fusing
17	—	Not used

Pin	Circuit	Circuit Function
18	391 (RD/YE)	Fused power output
19	1040 (RD/BK)	Run feed to secondary fusing
20	—	Not used
21	—	Not used
22	—	Not used
23	—	Not used
24	996 (OG/WH)	LH window motor current sense "low" to module, GEM-input
25	—	Not used
26	—	Not used
27	460 (YE/LB)	Horn relay feed
28	40 (LB/WH)	Cigar lighter feed
29	—	Not used
30	632 (GY/OG)	Dimmer switch to high beam headlamp fuse
31	1 (DB)	Horn switch control
32	383 (RD/WH)	Emergency warning flasher feed
33	53 (BK/LB)	Courtesy lamp switch to courtesy lamp
34	417 (VT/OG)	Fused output