C250

14401

Ignition switch
(11572)



F087165

Pin	Circuit	Circuit function
1	30-BB9 (RD)	Voltage supplied at all times (not overload protected)
2	20-DD6 (PK/WH)	Voltage, hot in run only
3	50-DD5 (GY/BK)	Voltage, ignition switch in Start (not overload protected)
4	75-DD1 (YE)	Voltage: Ignition switch in Accessory or Run
5	15-DD4 (GN/BK)	Voltage, ignition switch in Start or Run (not overload protected)
6	20-DD7 (PK/YE)	Voltage, hot in run only
7	30-BB20 (RD)	Voltage supplied at all times (not overload protected)
8	30S-GM7 (RD/WH)	Voltage supplied at all times (not overload protected), Switched

C251

14401

Data Link Connector
(DLC) (14489)

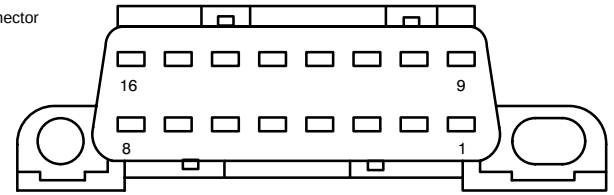

F16055

Pin	Circuit	Circuit function
1	–	not used
2	4-EG7 (GY/RD)	Data link, bus positive
3	–	not used
4	31-ED6 (BK)	Ground
5	91-ED6 (BK/YE)	Ground
6	4-EC7 (GY/RD)	Data link, bus positive
7	4-EE10 (GY/BK)	Data link, bus positive
8	–	not used
9	–	not used
10	5-EG7 (BU/RD)	Data link, bus negative
11	–	not used
12	–	not used
13	7-RE14 (YE/GN)	Voltage DC supplied at all times (sensor)
14	5-EC7 (BU/RD)	without heated seats
15	–	not used
16	29-ED6 (OG/YE)	Voltage supplied at all times (overload protected)