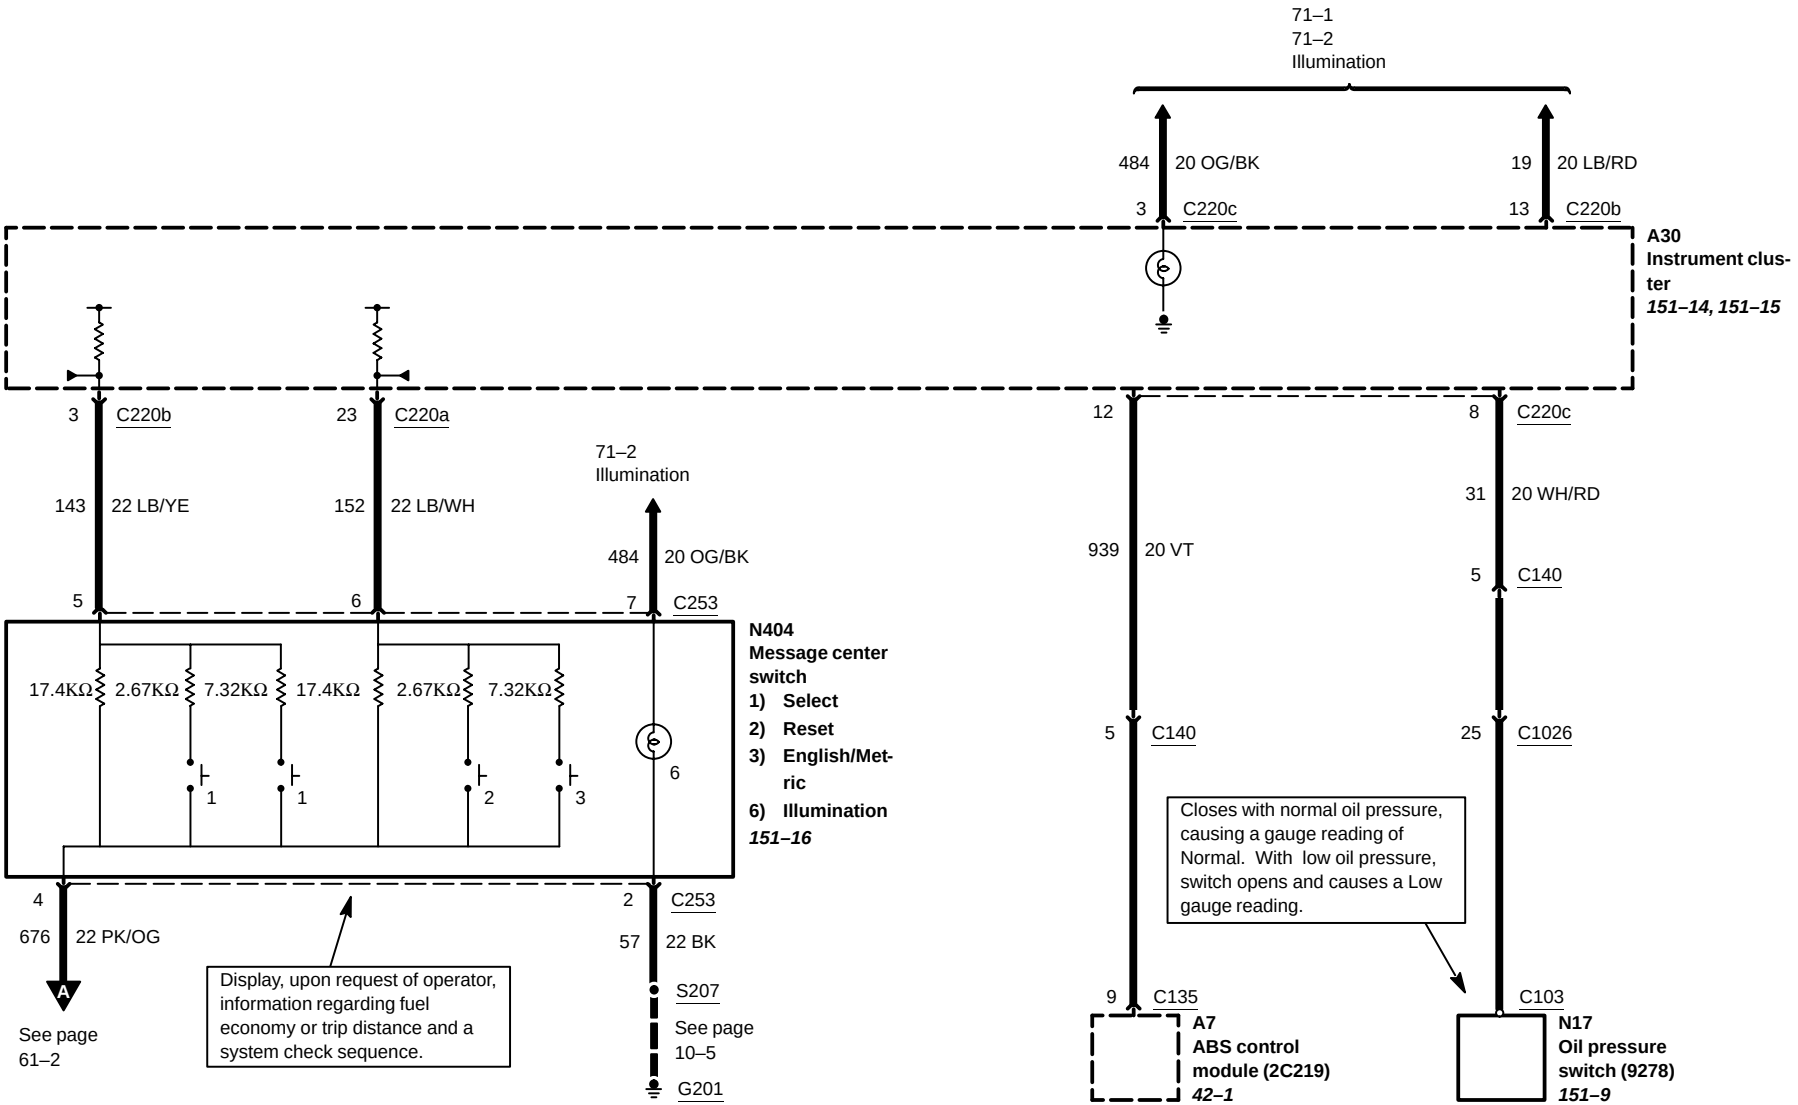
71–1
71–2
Illumination
484 20 OG/BK
3 C220c
19 20 LB/RD
13 C220b
A30
Instrument cluster
151–14, 151–15
3 C220b
23 C220a
71–2
Illumination
143 22 LB/YE
152 22 LB/WH
484 20 OG/BK
5
6
7 C253
N404
Message center switch
1) Select
2) Reset
3) English/Metric
6) Illumination
151–16
17.4KΩ 2.67KΩ 7.32KΩ 17.4KΩ 2.67KΩ 7.32KΩ
1 1 2 3 6
4
676 22 PK/OG
A
See page 61–2
Display, upon request of operator, information regarding fuel economy or trip distance and a system check sequence.
2 C253
57 22 BK
S207
See page 10–5
G201
12
8 C220c
31 20 WH/RD
939 20 VT
5 C140
5 C140
25 C1026
Closes with normal oil pressure, causing a gauge reading of Normal. With low oil pressure, switch opens and causes a Low gauge reading.
9 C135
C103
A7
ABS control module (2C219)
42–1
N17
Oil pressure switch (9278)
151–9