C270a (WH)

14401

P91
Central Junction
Box (CJB) (14A068)

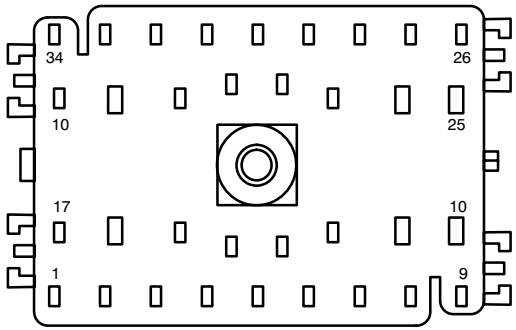

F34007

Pin	Circuit	Circuit function
1	10 (LG/RD)	Voltage supplied at all times (overload protected)
2	–	not used
3	–	not used
4	–	not used
5	12 (LG/BK)	Power, Hot with High Beams on
6	–	not used
7	1045 (DB/WH)	Battery voltage, Hot in park or head
8	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
9	–	not used
10	400 (LB/BK)	Accessory relay, switched power, output
11	185 (BK)	Voltage supplied at all times (overload protected)
12	53 (BK/LB)	Interior lamp relay, switched power, output
13	–	not used
14	298 (VT/OG)	Voltage in Run (overload protected)
15	295 (LB/PK)	Voltage in Run (overload protected)
16	297 (BK/LG)	Voltage in Run or Accessory (overload protected)
17	296 (WH/VT)	Fused accessory relay, switched power, output

Pin	Circuit	Circuit function
18	956 (OG/LG)	Voltage supplied at all times (overload protected)
19	1040 (RD/BK)	Voltage in Run (overload protected)
20	53 (BK/LB)	Interior lamp relay, switched power, output
21	59 (DG/VT)	Fused rear window defrost relay, switched power
22	402 (OG/LG)	Interior lamp relay, feed
23	–	not used
24	996 (OG/WH)	Window motor, feed, Down
25	170 (RD/LB)	Window lockout, switched power, output
26	1488 (LB)	Center console, Blower motor relay, feed
27	797 (LG/VT)	Voltage supplied at all times (overload protected)
28	40 (LB/WH)	Voltage supplied at all times (overload protected)
29	417 (VT/OG)	Air suspension disable switch, feed
30	632 (GY/OG)	Power, Hot with High Beams on
31	1003 (GY/YE)	Voltage in Run (overload protected)
32	729 (RD/WH)	Voltage supplied at all times (overload protected)
33	53 (BK/LB)	Interior lamp relay, switched power, output
34	298 (VT/OG)	Voltage in Run (overload protected)