69-3 MESSAGE CENTER

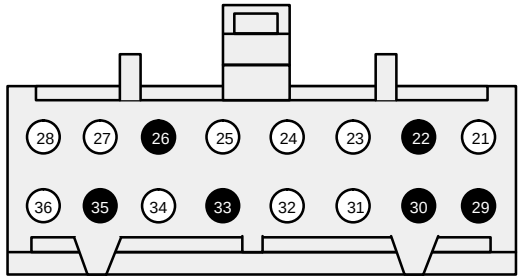

C2009

MESSAGE CENTER

PIN	CIRCUIT	CIRCUIT FUNCTION
21	57 (BK)	Ground
22	–	NOT USED
23	258 (WH/PK)	Oil Level Input
24	506 (RD)	English/Metric Output
25	183 (TN/YE)	Chime Output
26	–	NOT USED
27	54 (LG/YE)	Hot at All Times
28	570 (BK/WH)	Ground (Signal)
29	–	NOT USED
30	–	NOT USED
31	82 (PK/YE)	Low Washer Fluid Sense
32	397 (BK/WH)	Engine Select
33	–	NOT USED
34	11 (TN/YE)	Tachometer Input
35	–	NOT USED
36	57 (BK)	Ground (Power)

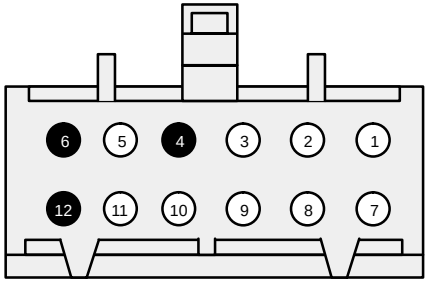

C2008

MESSAGE CENTER

PIN	CIRCUIT	CIRCUIT FUNCTION
1	715 (LG)	Message Center Switch Input (Bank 2)
2	19 (LB/RD)	Illumination Feed
3	29 (YE/WH)	Fuel Level Input
4	–	NOT USED
5	305 (LB/PK)	Fuel Flow Input
6	–	NOT USED
7	704 (DG/LG)	Message Center Switch Input (Bank 1)
8	39 (RD/WH)	Engine Temp Sense
9	254 (DG/WH)	Oil Temperature Input
10	1003 (GY/YE)	Hot in Run
11	679 (GY/BK)	Speed Sensor Input
12	–	NOT USED