C4107 (WH)

19949

Auxiliary blower motor resistor assembly (19A706)



F04331

Pin	Circuit	Circuit function
1	752 (YE/RD)	medium low
2	755 (BN/WH)	Low
3	751 (DB/WH)	medium high
4	515 (OG/RD)	Rear A/C blower speed relay 2, switched output

C4117 (BK)

19949

Rear A/C blower speed relay 1

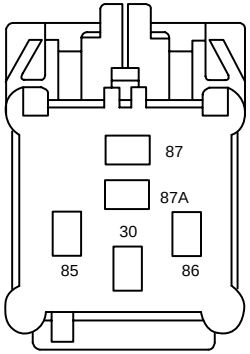

F05149

Pin	Circuit	Circuit function
30	884 (YE/BK)	Voltage supplied at all times (overload protected)
85	753 (YE/RD)	Function selector switch assembly, front, output
86	57 (BK)	Ground
87	371 (PK/WH)	Rear A/C blower speed relay 1, switched output
87A	–	not used

C4118 (BK)

19949

Rear A/C blower speed relay 2

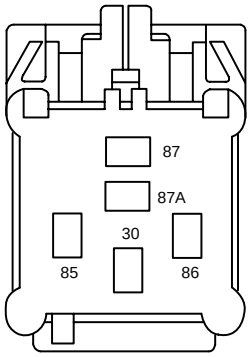

F05149

Pin	Circuit	Circuit function
30	261 (OG/BK)	Auxiliary blower motor (19805), output
85	753 (YE/RD)	Function selector switch assembly, front, output
86	757 (RD/WH)	Rear A/C blower speed relay 2, control
87	57 (BK)	Ground
87A	515 (OG/RD)	Rear A/C blower speed relay 2, switched output

C4119 (NA)

14405

Door ajar switch, rear doors



F03261

Pin	Circuit	Circuit function
1	53 (BK/LB)	Interior lamps, control
2	54 (LG/YE)	Voltage supplied at all times (overload protected)
3	–	not used