## C291

### 14401

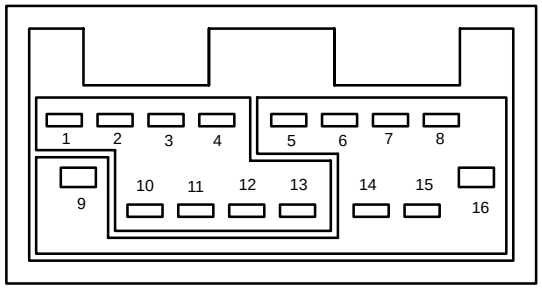


F16054

(1) 19 (LB/RD)
(2) 57 (BK)
(3) 1000 (RD/BK)
(4) –
(5) 802 (OG/RD)
(6) 803 (BN/PK)
(7) 805 (WH/LG)
(8) 811 (DG/OG)
(9) 797 (LG/VT)
(10) 1002 (BK/PK)
(11) 694 (BK/LG)
(12) 800 (GY/LB)
(13) 801 (TN/YE)
(14) 804 (OG/LG)
(15) 813 (LB/WH)
(16) 694 (BK/LG)

### 14588

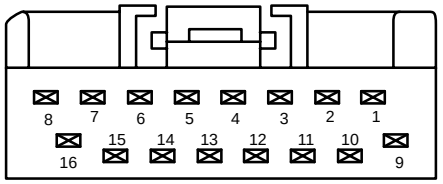


F16071

(1) 19 (LB/RD)
(2) 57 (BK)
(3) 1000 (RD/BK)
(4) –
(5) 802 (OG/RD)
827 (TN/WH)
(6) 803 (BN/PK)
(7) 805 (WH/LG)
(8) 811 (DG/OG)
(9) 797 (LG/VT)
(10) 1002 (BK/PK)
(11) 694 (BK/LG)
(12) 800 (GY/LB)
825 (TN/LG)
(13) 801 (TN/YE)
(14) 804 (OG/LG)
(15) 813 (LB/WH)
(16) 694 (BK/LG)

## C294a

### 14401

P76
Function selector
switch assembly




F04153

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | 181 (BN/OG) | Blower motor relay control |
| 2 | 296 (WH/VT) | Voltage in Run (overload protected) |
| 3 | 348 (VT) | A/C demand signal |
| 4 | 295 (LB/PK) | Voltage in Run (overload protected) |

## C294b

### 14401

P76
Function selector
switch assembly




F04193

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | 57 (BK) | Ground |
| 2 | 261 (OG/BK) | Blower motor, control |
| 3 | 754 (LG/WH) | Blower switch speed control, to resistor |
| 4 | 752 (YE/RD) | Blower switch speed control, to resistor |