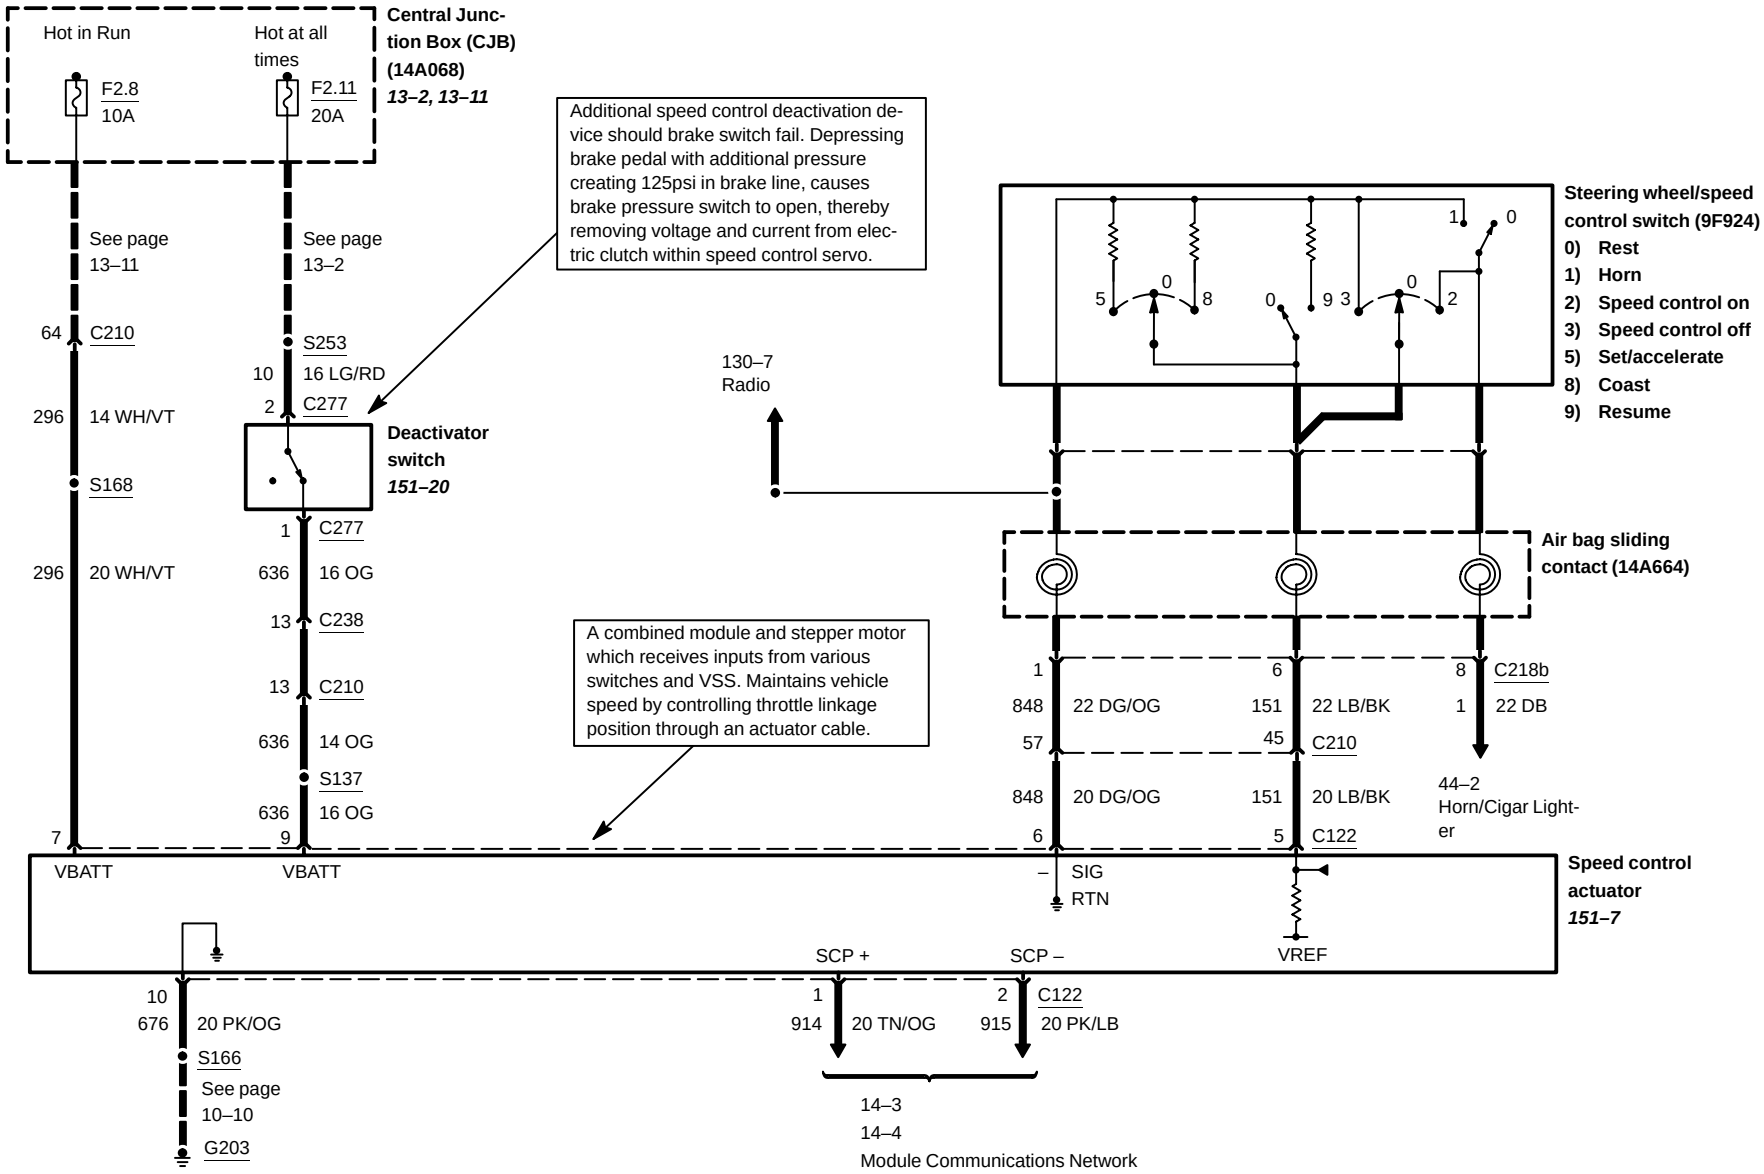
Hot in Run
Hot at all times
F2.8
10A
F2.11
20A
Central Junction Box (CJB) (14A068)
13–2, 13–11
See page 13–11
See page 13–2
64 C210
296 14 WH/VT
S168
296 20 WH/VT
7
VBATT
10 S253
16 LG/RD
2 C277
Deactivator switch
151–20
1 C277
636 16 OG
13 C238
13 C210
636 14 OG
S137
636 16 OG
9
VBATT
Additional speed control deactivation device should brake switch fail. Depressing brake pedal with additional pressure creating 125psi in brake line, causes brake pressure switch to open, thereby removing voltage and current from electric clutch within speed control servo.
A combined module and stepper motor which receives inputs from various switches and VSS. Maintains vehicle speed by controlling throttle linkage position through an actuator cable.
130–7
Radio
Steering wheel/speed control switch (9F924)
0) Rest
1) Horn
2) Speed control on
3) Speed control off
5) Set/accelerate
8) Coast
9) Resume
Air bag sliding contact (14A664)
1 848 22 DG/OG 57
6 151 22 LB/BK 45 C210
8 C218b
1 22 DB
848 20 DG/OG
151 20 LB/BK
44–2
Horn/Cigar Lighter
6 – SIG
RTN
5 C122
VREF
Speed control actuator
151–7
SCP +
SCP –
10 676 20 PK/OG
S166
See page 10–10
G203
1 914 20 TN/OG
2 915 20 PK/LB C122
14–3
14–4
Module Communications Network