C250

14401

N278
Ignition switch

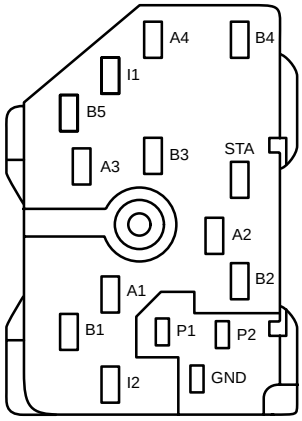

F15009

Pin	Circuit	Circuit Function
I2	–	not used
B1	1050 (LG/VT)	Voltage supplied at all times (overload protected)
A1	297 (BK/LG)	Voltage in Run or Accessory (overload protected)
P1	–	not used
GND	–	not used
P2	–	not used
B2	–	not used
A2	–	not used
STA	32 (RD/LB)	Voltage supplied in Start (overload protected)
B3	1050 (LG/VT)	Voltage supplied at all times (overload protected)
A3	–	not used
B5	1050 (LG/VT)	Voltage supplied at all times (overload protected)
I1	16 (RD/LG)	Voltage supplied in Start and Run (overload protected)
A4	687 (GY/YE)	Voltage in Run (overload protected)
B4	1050 (LG/VT)	Voltage supplied at all times (overload protected)

C251

14401

D20
Data Link Connector
(DLC)

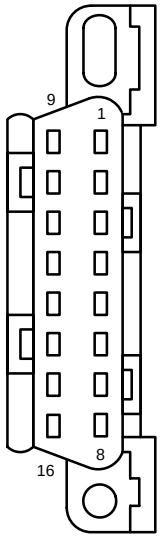

F16063

Pin	Circuit	Circuit Function
1	–	not used
2	914 (TN/OG)	SCP Bus +
3	–	not used
4	57 (BK)	Ground
5	398 (BK/YE)	Ground
6	–	not used
7	70 (LB/WH)	ISO Bus
8	–	not used
9	–	not used
10	915 (PK/LB)	SCP Bus -
11	–	not used
12	–	not used
13	107 (VT)	Flash EEPROM power supply
14	–	not used
15	–	not used
16	1047 (LG/RD)	Voltage supplied at all times (overload protected)

C252

14401

A102
Passive anti–theft
transceiver module



F04099

Pin	Circuit	Circuit Function
1	398 (BK/YE)	Ground
2	1044 (WH/YE)	Voltage supplied in Start and Run (overload protected)
3	168 (RD/BK)	RX, signal
4	167 (BN/OG)	TX, signal