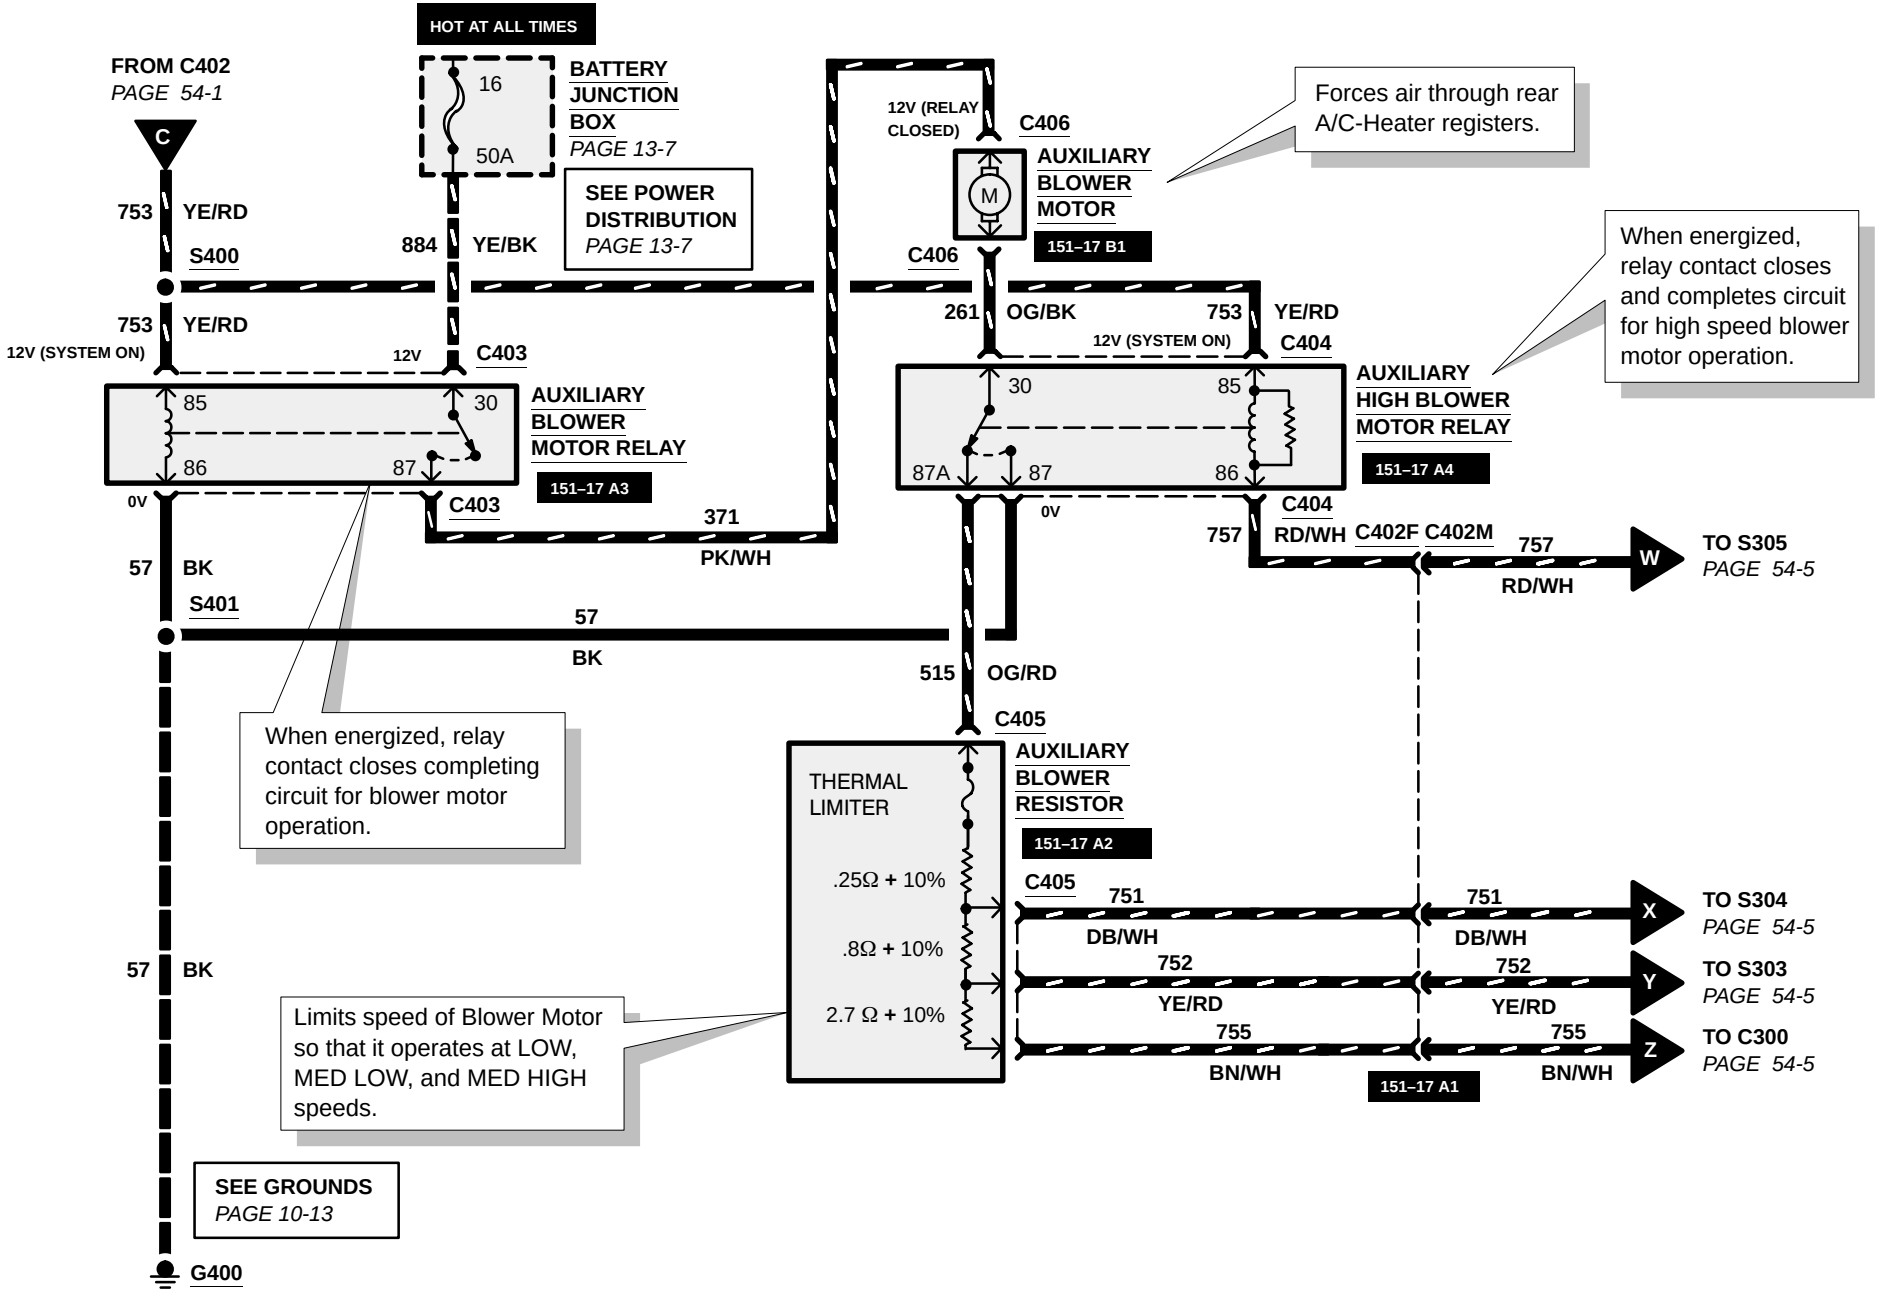
HOT AT ALL TIMES
FROM C402
PAGE 54-1
C
753 YE/RD
S400
753 YE/RD
12V (SYSTEM ON)
16
50A
BATTERY JUNCTION BOX
PAGE 13-7
SEE POWER DISTRIBUTION
PAGE 13-7
884 YE/BK
12V
C403
85
30
86
87
AUXILIARY BLOWER MOTOR RELAY
151–17 A3
0V
C403
371 PK/WH
57 BK
S401
57 BK
57 BK
SEE GROUNDS
PAGE 10-13
G400
When energized, relay contact closes completing circuit for blower motor operation.
12V (RELAY CLOSED)
C406
M
AUXILIARY BLOWER MOTOR
151–17 B1
Forces air through rear A/C-Heater registers.
C406
261 OG/BK
753 YE/RD
12V (SYSTEM ON)
C404
When energized, relay contact closes and completes circuit for high speed blower motor operation.
30
85
87A
87
86
AUXILIARY HIGH BLOWER MOTOR RELAY
151–17 A4
0V
C404
757 RD/WH
C402F C402M
757 RD/WH
W
TO S305
PAGE 54-5
57 BK
515 OG/RD
C405
THERMAL LIMITER
.25Ω + 10%
.8Ω + 10%
2.7 Ω + 10%
AUXILIARY BLOWER RESISTOR
151–17 A2
Limits speed of Blower Motor so that it operates at LOW, MED LOW, and MED HIGH speeds.
C405
751 DB/WH
751 DB/WH
X
TO S304
PAGE 54-5
752 YE/RD
752 YE/RD
Y
TO S303
PAGE 54-5
755 BN/WH
755 BN/WH
Z
TO C300
PAGE 54-5
151–17 A1