C205 (GY)

14401

Main light switch
(11654)



F09035

Pin	Circuit	Circuit function
I	19 (LB/RD)	Instrument illumination, feed
B1	38 (BK/OG)	Voltage supplied at all times (overload protected)
B2	195 (TN/WH)	Voltage supplied at all times (overload protected)
D1	54 (LG/YE)	Voltage supplied at all times (overload protected)
D2	53 (BK/LB)	Interior lamp relay, switched power, output
DN	–	not used
H	15 (RD/YE)	Power, Hot with Headlamps on
IGN	–	not used
R	14 (BN)	Power, Exterior lamps

C210 (BK)

* with Rear Seat Entertainment (RSE) system
** dealer–fitted

14A200

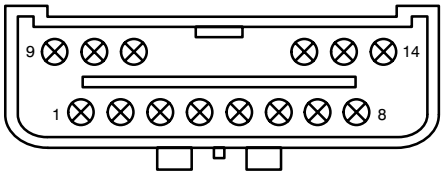

F14008

(1) 324 (YE/LG)
(2) 70 (LB/WH)
(3) 1044 (WH/YE)
(4) 1079 (LG/RD)
(5) 1080 (LG/BK)
(6) 1081 (YE/RD)
(7) 1082 (YE/BK)
(8) 159 (RD/PK)
(9) *48 (BK)
1000 (RD/BK)
(10) 937 (RD/WH)
(11) 1562 (YE)
**175 (BK/YE)
(12) *1561 (OG)
(13) *1560 (WH)
**296 (WH/PK)
(14) *1559 (RD)
**964 (DB/LG)
**931 (OG)

14401

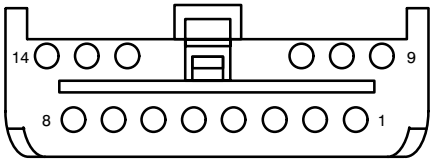

F14057

(1) 324 (YE/LG)
(2) 70 (LB/WH)
(3) 1044 (WH/YE)
(4) 1079 (LG/RD)
(5) 1080 (LG/BK)
(6) 1081 (YE/RD)
(7) 1082 (YE/BK)
(8) 159 (RD/PK)
(9) 1000 (RD/BK)
*48 (BK)
(10) 937 (RD/WH)
(11) 1562 (YE)
(12) *1561 (OG)
(13) *1560 (WH)
(14) *1559 (RD)
964 (DB/LG)