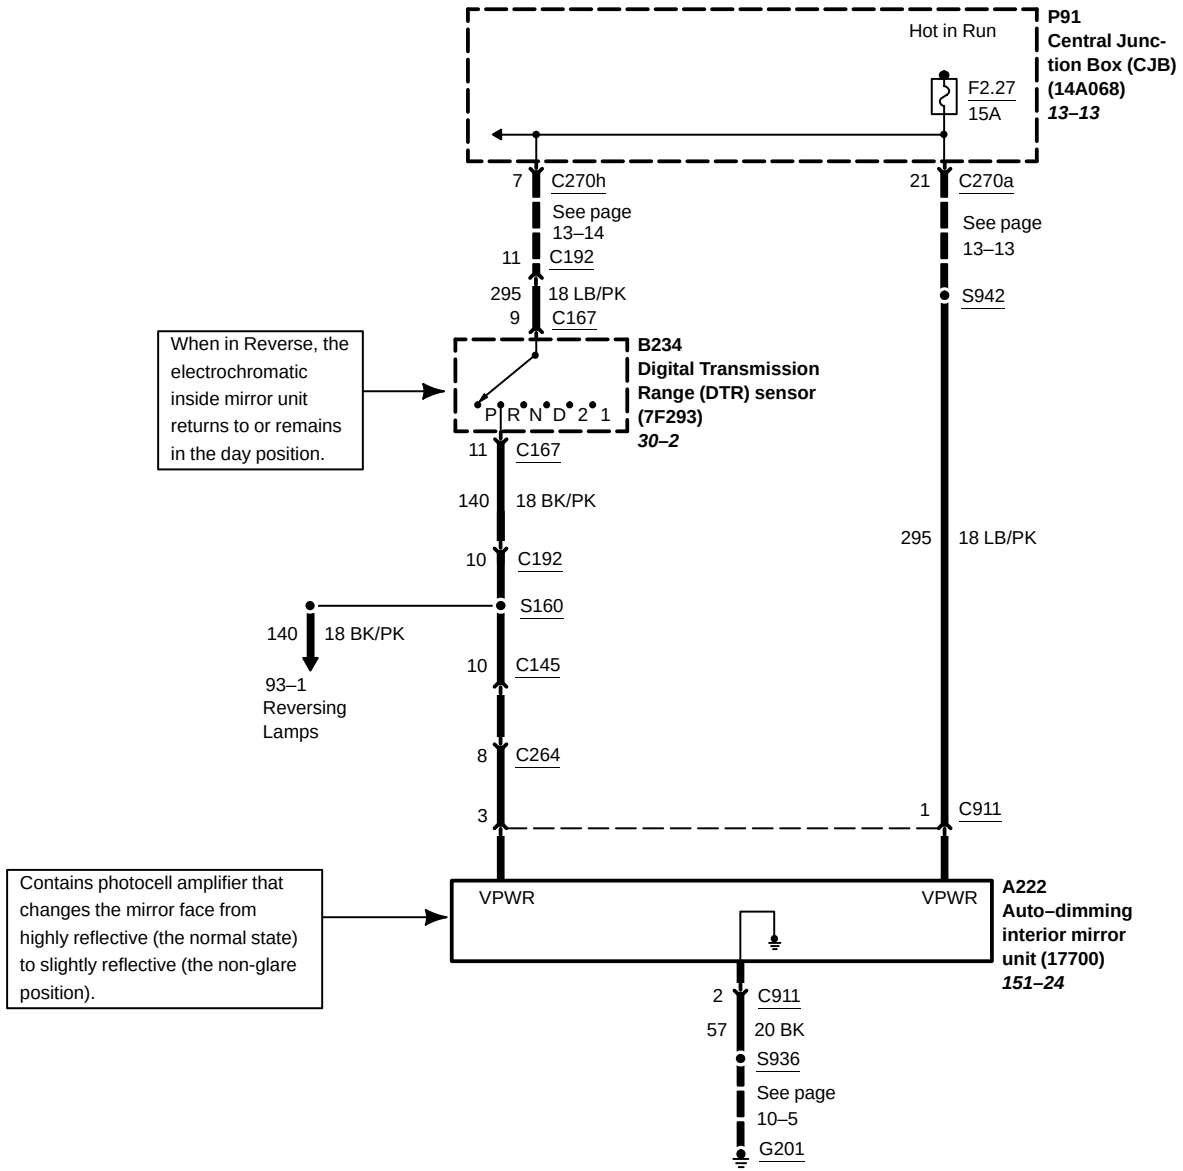
Hot in Run
P91
Central Junction Box (CJB)
(14A068)
13–13
F2.27
15A
7 C270h
See page 13–14
11 C192
295 18 LB/PK
9 C167
21 C270a
See page 13–13
S942
When in Reverse, the electrochromatic inside mirror unit returns to or remains in the day position.
B234
Digital Transmission Range (DTR) sensor
(7F293)
30–2
P R N D 2 1
11 C167
140 18 BK/PK
10 C192
295 18 LB/PK
S160
140 18 BK/PK
93–1
Reversing Lamps
10 C145
8 C264
3
1 C911
Contains photocell amplifier that changes the mirror face from highly reflective (the normal state) to slightly reflective (the non-glare position).
VPWR
VPWR
A222
Auto–dimming interior mirror unit (17700)
151–24
2 C911
57 20 BK
S936
See page 10–5
G201