C248 (GY)

14401

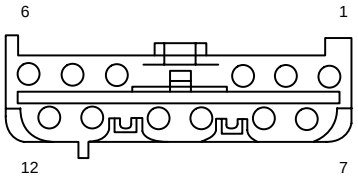

F12173

(1)	486 (BN/WH)
(2)	–
(3)	–
(4)	–
(5)	–
(6)	–
(7)	–
(8)	615 (GY/WH)
(9)	614 (GY/OG)
(10)	1517 (RD/OG)
(11)	1516 (YE/WH)
(12)	–

14A005



F12145

(1)	486 (BN/WH)
(2)	–
(3)	–
(4)	–
(5)	–
(6)	–
(7)	–
(8)	615 (GY/WH)
(9)	614 (GY/OG)
(10)	1517 (RD/OG)
(11)	1516 (YE/WH)
(12)	–

C250 (BK/GY)

14401

Ignition switch
(11572)

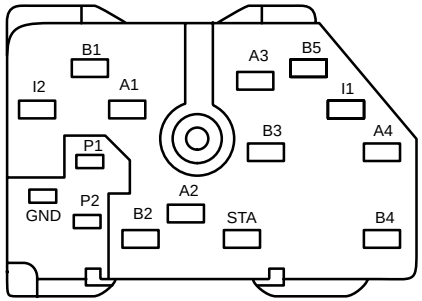

F15009

Pin	Circuit	Circuit function
A1	297 (BK/LG)	Voltage in Run or Accessory (overload protected)
A2	687 (GY/YE)	Voltage in Run (overload protected)
A3	687 (GY/YE)	Voltage in Run (overload protected)
A4	489 (PK/BK)	Voltage in Run (overload protected)
B1	276 (BN)	Voltage supplied at all times (overload protected)
B2	568 (LG)	Voltage supplied at all times (overload protected)
B3	568 (LG)	Voltage supplied at all times (overload protected)
B4	37 (YE)	Voltage supplied at all times (overload protected)
B5	276 (BN)	Voltage supplied at all times (overload protected)
GND	57 (BK)	Ground
I1	1044 (WH/YE)	Voltage supplied in Start and Run (overload protected)
I2	1050 (LG/VT)	Voltage supplied in Start (overload protected)
P1	–	not used
P2	409 (TN/BK)	Brake fluid level switch (2L414) to Ignition switch (11572)
STA	32 (RD/LB)	Voltage supplied in Start (overload protected)