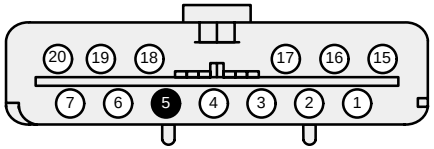

C297

ELECTRONIC AUTOMATIC TEMPERATURE CONTROL (EATC) MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
1	915 (PK/LB)	SCP Data Bus (–)
2	54 (LG/YE)	Power (Hot at All Times)
3	57 (BK)	Ground
4	470 (PK/BK)	Ambient, Sunload & In-Car (Input GND)
5	–	NOT USED
6	243 (LG/OG)	Blend Door Actuator +5V
7	788 (RD/OG)	Ambient Air Temperature Sensor Input
15	914 (TN/OG)	SCP Data Bus (+)
16	364 (BK/LG)	Power (Hot in Run)
17	575 (YE/BK)	Blower Motor Relay to ATC Control Ground
18	351 (BN/WH)	Blend Door Position Feedback
19	19 (LB/RD)	Instrument Illumination
20	468 (BN)	Sunload Sensor Input

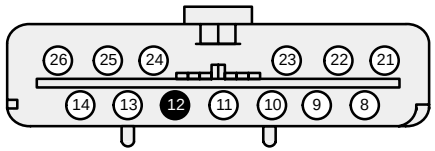

C298

ELECTRONIC AUTOMATIC TEMPERATURE CONTROL (EATC) MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
8	583 (YE)	EATC to Air Bag Sliding Contact
9	776 (OG/BK)	Blend Door Actuator Ground
10	184 (TN/OG)	Blower Motor Speed Controller Feedback
11	348 (VT)	A/C Demand Signal to PCM
12	–	NOT USED
13	250 (OG)	Blend Door Actuator Motor Drive 1-CCW
14	235 (RD/BK)	Lamp Illumination
21	790 (WH/OG)	In-Car Temperature Sensor Input
22	260 (RD/OG)	Rear Blower Relay Ground
23	181 (BN/OG)	Speed Controller Output
24	775 (WH/PK)	Blower Motor Relay Output
25	506 (RD)	English/Metric Input
26	249 (DB/LG)	Blend Door Actuator Motor Drive 2-CW