C2247 (BK)

14401

In–vehicle temperature/humidity sensor



F04289

Pin	Circuit	Circuit function
1	790 (WH/OG)	Vehicle interior, Temperature, signal
2	3062 (BK/WH)	In–vehicle temperature/humidity sensor, Power
3	470 (PK/BK)	Sensor signal return (reference/ground)
4	3063 (TN/OG)	Vehicle interior, humidity, signal

Late production

C2253a

14401

Audio/navigation control unit

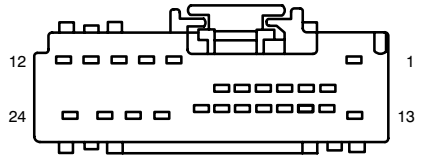

F24021

Pin	Circuit	Circuit function
1	797 (LG/VT)	Voltage supplied at all times (overload protected)
2	194 (PK)	Accessory delay relay, output
3	19 (LB/RD)	Illumination, Power
4	57 (BK)	Ground
5	–	not used
6	–	not used
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	–	not used
12	–	not used
13	694 (BK/LG)	Ground
14	–	not used
15	1000 (RD/BK)	Voltage supplied in Start (overload protected)
16	–	Ground
17	–	not used
18	595 (LB/RD)	Audio/climate control switch, Radio (18806), signal
19	–	not used
20	689 (DB)	Parking aid, mute, signal
21	–	not used
22	–	not used
23	–	not used
24	694 (BK/LG)	Ground