C250

14401

N278
Ignition switch
(11572)

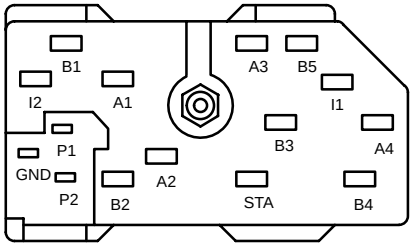

F15014

Pin	Circuit	Circuit function
A1	297 (BK/LG)	Voltage in Run or Accessory (overload protected)
A2	687 (GY/YE)	Voltage in Run (overload protected)
A3	1040 (RD/BK)	Voltage in Run (overload protected)
A4	687 (GY/YE)	Voltage in Run (overload protected)
B1	37 (YE)	Voltage supplied at all times (overload protected)
B2	37 (YE)	Voltage supplied at all times (overload protected)
B3	37 (YE)	Voltage supplied at all times (overload protected)
B4	1050 (LG/VT)	Voltage supplied at all times (overload protected)
B5	1050 (LG/VT)	Voltage supplied at all times (overload protected)
GND	–	not used
I1	16 (RD/LG)	Voltage supplied in Start and Run (overload protected)
I2	–	not used
P1	–	not used
P2	–	not used
STA	33 (WH/PK)	Voltage supplied in Start (overload protected)

C251

14401

D20
Data Link Connector
(DLC) (14489)

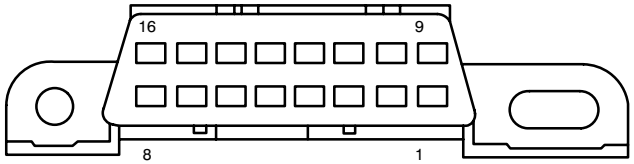

F16121

Pin	Circuit	Circuit function
1	–	not used
2	914 (TN/OG)	SCP Bus, +
3	–	not used
4	1205 (BK)	Ground
5	651 (BK/YE)	Ground
6	–	not used
7	70 (LB/WH)	ISO Bus
8	–	not used
9	–	not used
10	915 (PK/LB)	SCP Bus, –
11	–	not used
12	–	not used
13	107 (VT)	Module programming signal
14	–	not used
15	–	not used
16	1047 (LG/RD)	Voltage supplied at all times (overload protected)

C252

14401

A102
Passive anti–theft
transceiver module
(15607)



F04257

Pin	Circuit	Circuit function
1	397 (BK/WH)	Ground
2	20 (WH/LB)	Voltage supplied in Start and Run (overload protected)
3	1216 (GY/OG)	RX, signal
4	1215 (WH/LG)	TX, signal