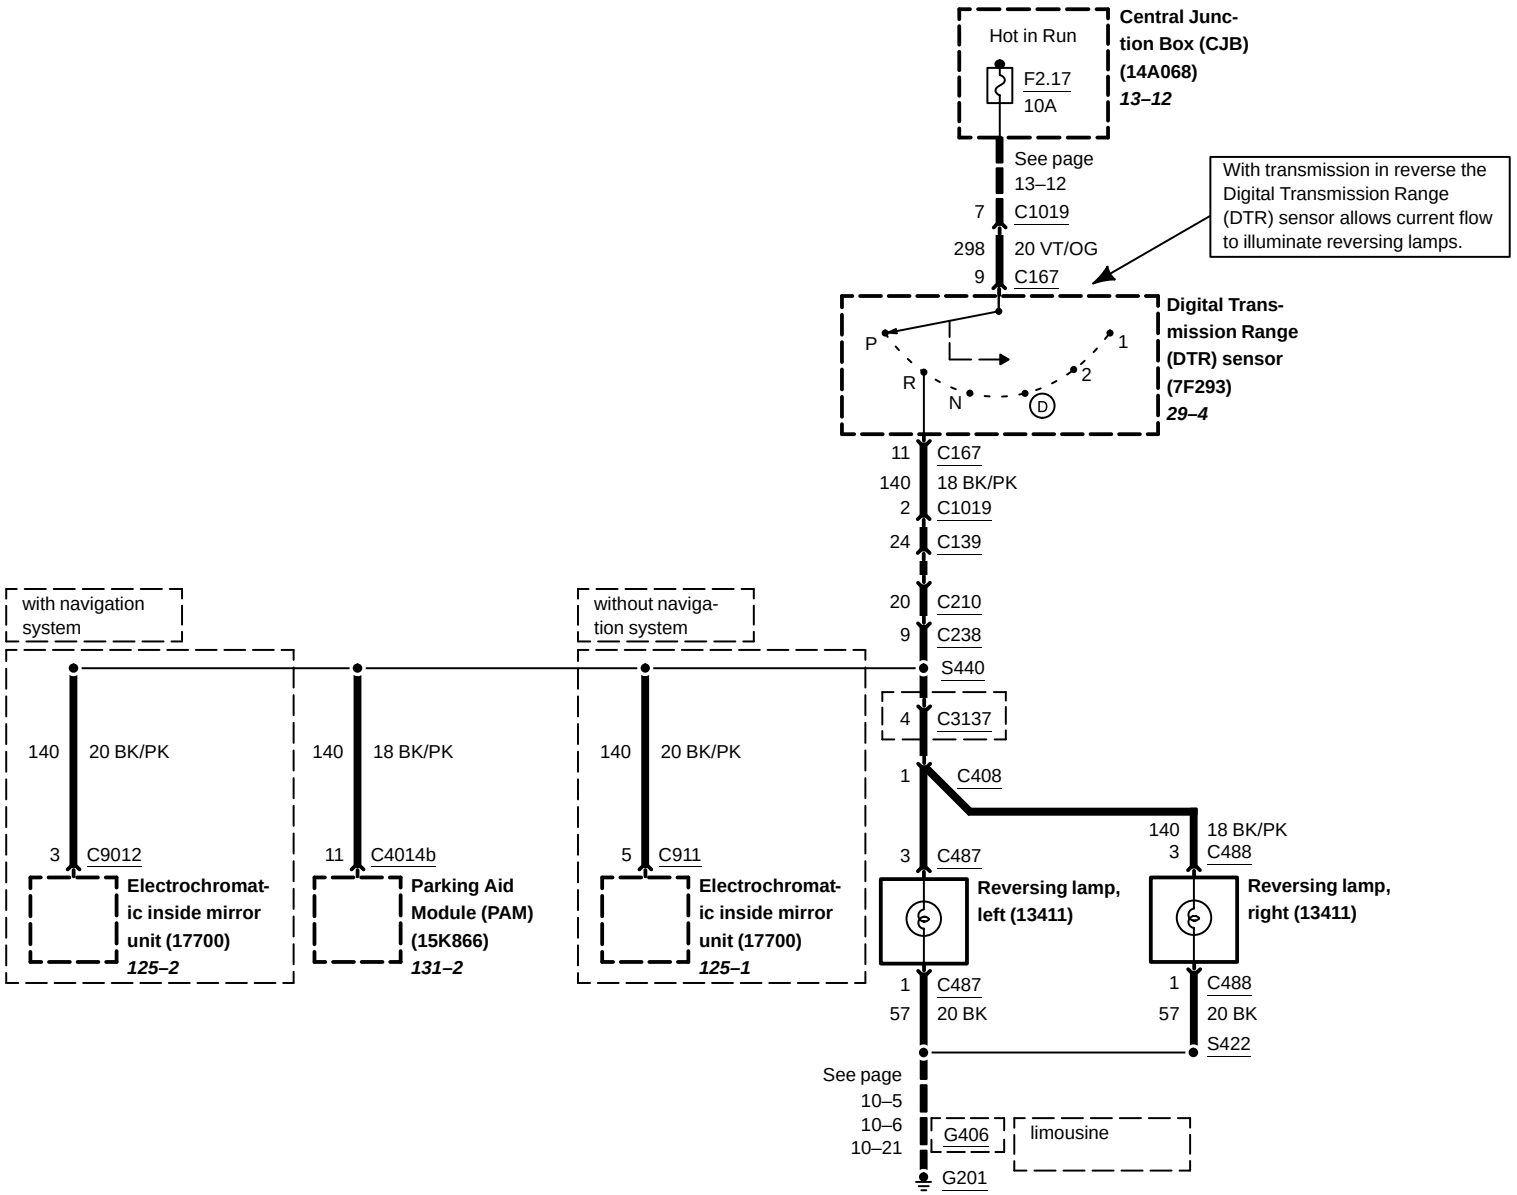
Hot in Run
F2.17
10A
Central Junction Box (CJB)
(14A068)
13–12
See page
13–12
7
C1019
298
20 VT/OG
9
C167
With transmission in reverse the Digital Transmission Range (DTR) sensor allows current flow to illuminate reversing lamps.
P
R
N
D
1
2
Digital Transmission Range (DTR) sensor
(7F293)
29–4
11
C167
140
18 BK/PK
2
C1019
24
C139
20
C210
9
C238
S440
4
C3137
1
C408
with navigation system
without navigation system
140
20 BK/PK
3
C9012
Electrochromatic inside mirror unit (17700)
125–2
140
18 BK/PK
11
C4014b
Parking Aid Module (PAM)
(15K866)
131–2
140
20 BK/PK
5
C911
Electrochromatic inside mirror unit (17700)
125–1
3
C487
Reversing lamp, left (13411)
1
C487
57
20 BK
140
18 BK/PK
3
C488
Reversing lamp, right (13411)
1
C488
57
20 BK
S422
See page
10–5
10–6
10–21
G406
limousine
G201