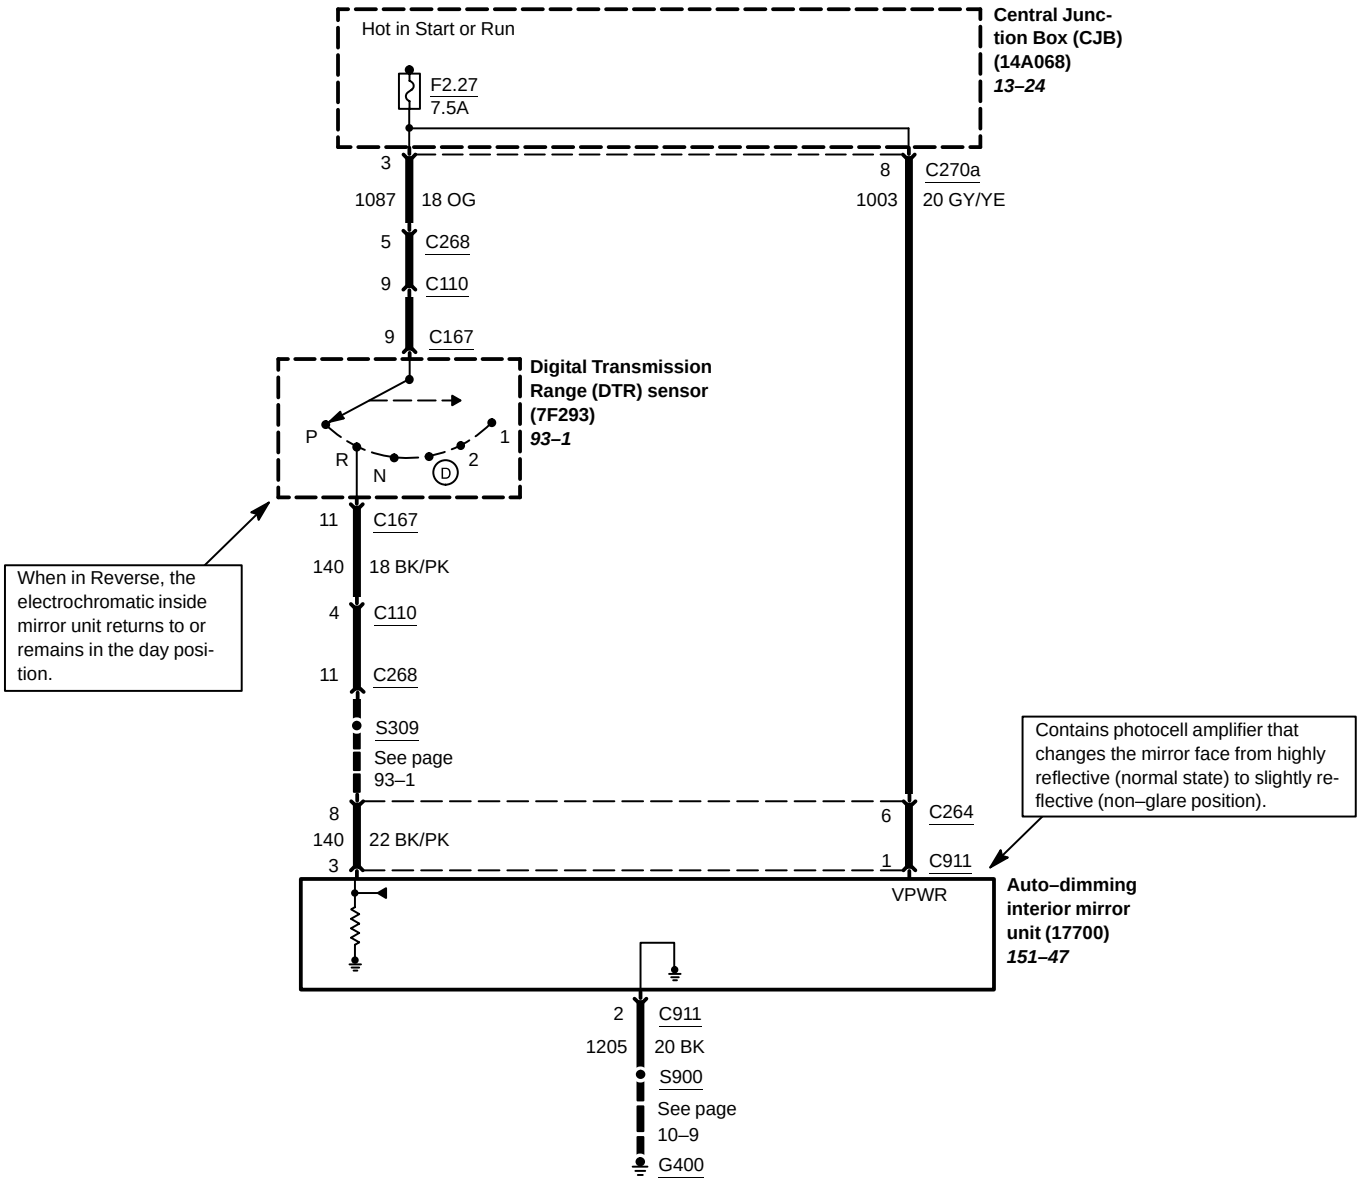
Hot in Start or Run
F2.27
7.5A
Central Junction Box (CJB)
(14A068)
13–24
3
1087
18 OG
5
C268
9
C110
9
C167
8
C270a
1003
20 GY/YE
Digital Transmission Range (DTR) sensor
(7F293)
93–1
P
R
N
D
1
2
11
C167
140
18 BK/PK
4
C110
11
C268
When in Reverse, the electrochromatic inside mirror unit returns to or remains in the day position.
S309
See page 93–1
8
140
22 BK/PK
3
6
C264
1
C911
VPWR
Contains photocell amplifier that changes the mirror face from highly reflective (normal state) to slightly reflective (non–glare position).
Auto–dimming interior mirror unit (17700)
151–47
2
C911
1205
20 BK
S900
See page 10–9
G400