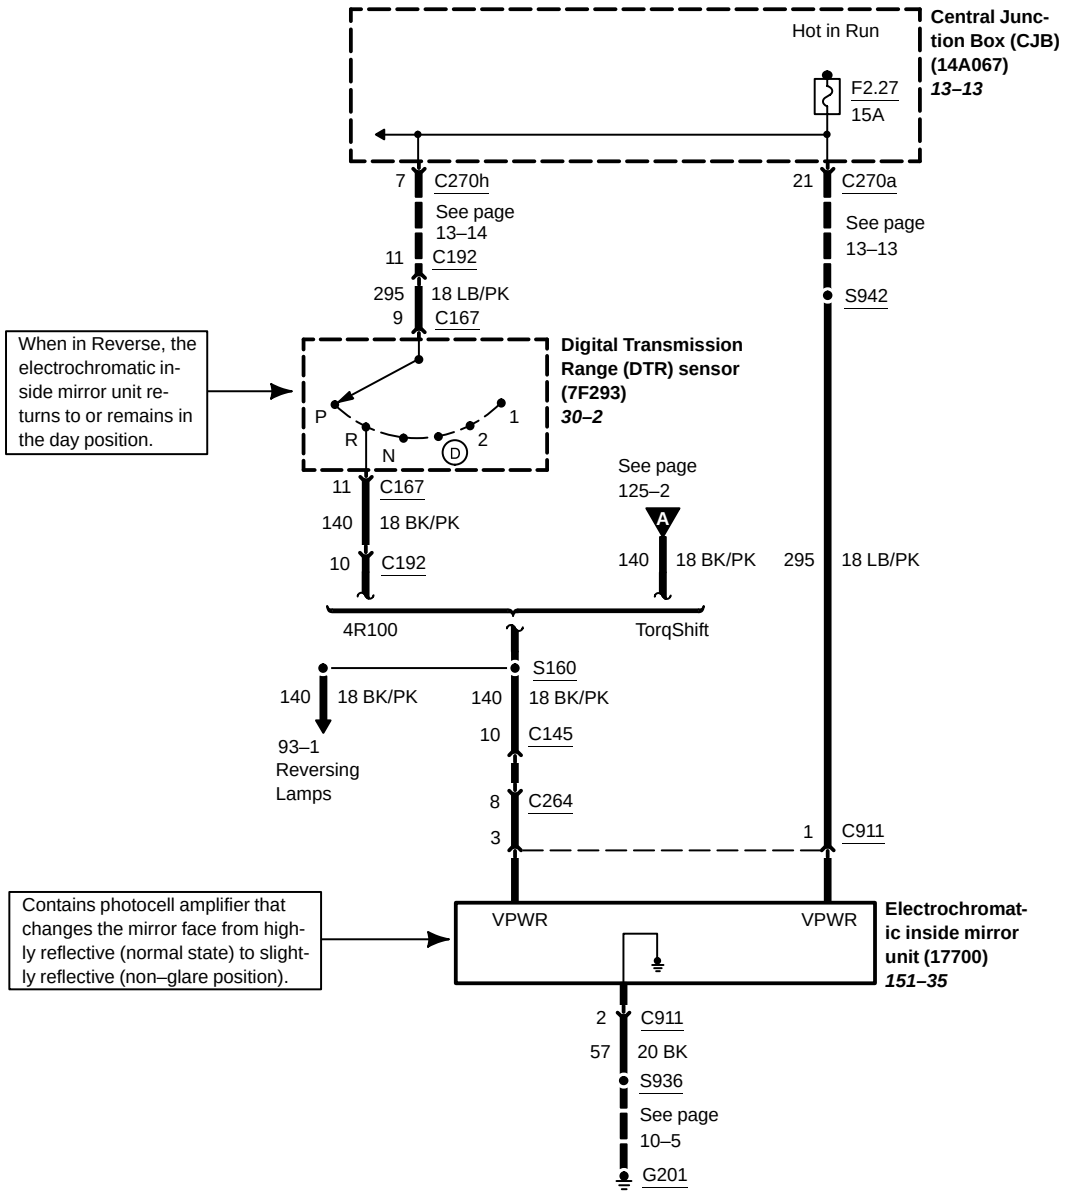
Central Junction Box (CJB) (14A067) 13–13
Hot in Run
F2.27
15A
7 C270h
See page 13–14
11 C192
295 18 LB/PK
9 C167
21 C270a
See page 13–13
S942
When in Reverse, the electrochromatic inside mirror unit returns to or remains in the day position.
Digital Transmission Range (DTR) sensor (7F293) 30–2
P R N D 1 2
11 C167
140 18 BK/PK
10 C192
See page 125–2
A
140 18 BK/PK
295 18 LB/PK
4R100
TorqShift
S160
140 18 BK/PK
140 18 BK/PK
10 C145
93–1 Reversing Lamps
8 C264
3
1 C911
Contains photocell amplifier that changes the mirror face from highly reflective (normal state) to slightly reflective (non–glare position).
VPWR
VPWR
Electrochromatic inside mirror unit (17700) 151–35
2 C911
57 20 BK
S936
See page 10–5
G201