C2060

14401

N465
Rear window adjust switch



F10040

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	–	not used
4	404 (VT/LG)	Window motor
5	57 (BK)	Ground
	235 (RD/BK)	Instrument illumination, feed
6	570 (BK/WH)	Ground
7	407 (TN/BK)	Window motor
8	235 (RD/BK)	Instrument illumination, feed
	57 (BK)	Ground
9	405 (VT/LB)	Window motor
10	–	not used

C2097

14401

A271
Passive anti–theft transceiver



F04106

Pin	Circuit	Circuit function
1	570 (BK/WH)	Ground
2	16 (RD/LG)	Voltage supplied in Start and Run (overload protected)
3	1216 (GY/OG)	RX, signal
4	1215 (WH/LG)	TX, signal

C2100a

14401

A112
Generic Electronic Module (GEM)
(14B205)

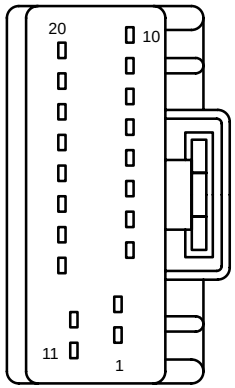

F20020

Pin	Circuit	Circuit function
1	1001 (WH/YE)	Voltage supplied at all times (overload protected)
2	570 (BK/WH)	Ground
3	70 (LB/WH)	ISO Bus
4	587 (VT/YE)	Liftgate wiper motor, input
5	85 (BN/LB)	Safety belt buckle switch (10B924), input
6	591 (LG)	Rear window wiper raise relay, output
7	592 (TN)	Rear window wiper lower relay, output
8	1009 (OG/YE)	Rear window defrost relay, control
9	684 (PK/YE)	Wiper/washer, input
10	680 (LB/OG)	Wiper/washer, delay input
11	995 (GY)	Window motor, feed, Down
12	996 (OG/WH)	Window motor, feed, Down
13	1010 (DB/OG)	Rear window defrost switch (18578), input
14	679 (GY/BK)	Vehicle Speed Sensor (VSS) +
15	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
16	–	not used
17	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
18	158 (BK/PK)	Key warning switch (11A127), input
19	485 (PK/BK)	Rear window wiper/washer switch, input
20	1302 (WH/LG)	Multifunction switch, Signal return