28-5 TRANSMISSION CONTROLS (ALLISON 2000/2400)

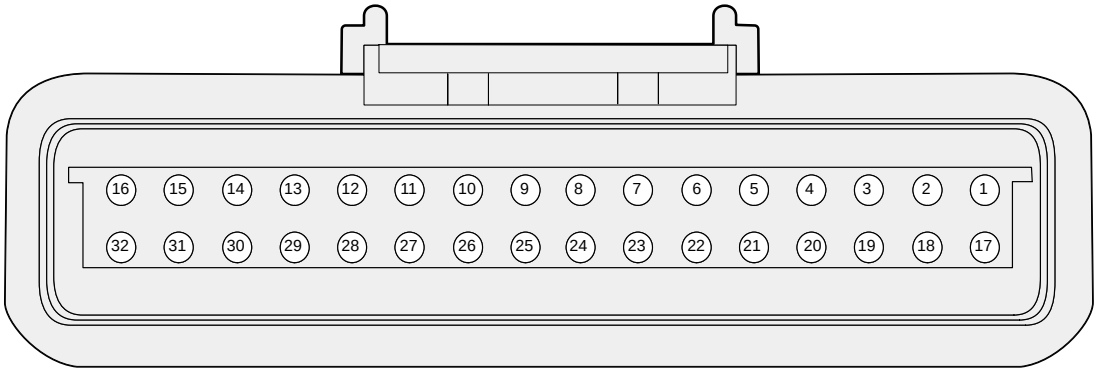

C339

ALLISON 2000/2400 CONTROL UNIT

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
1	201 (TN/RD)	To Allison 2000/2400 Transmission	16	216 (TN/RD)	Output Speed Sensor (Low)
2	202 (OG/LG)	To Allison 2000/2400 Transmission	17	217 (DB/OG)	Engine Speed Sensor (High)
3	203 (OG/LB)	To Allison 2000/2400 Transmission	18	218 (WH/VT)	Engine Speed Sensor (Low)
4	234 (DB/WH)	To Allison 2000/2400 Transmission	19	48	Terminates in Harness
5	205 (DB/LG)	To NSBU Switch #2	20	220 (VT/OG)	To Allison 2000/2400 Transmission
6	206 (WH)	To NSBU Switch #2	21	221 (OG/WH)	To Allison 2000/2400 Transmission
7	207 (YE/RD)	To NSBU Switch #2	22	222 (BN/LG)	To Allison 2000/2400 Transmission
8	208 (GY)	To NSBU Switch #2	23	223 (TN/LG)	To Allison 2000/2400 Transmission
9	48	Terminates in Harness	24	224 (TN/WH)	To Allison 2000/2400 Transmission
10	210 (LB)	To Allison 2000/2400 Transmission	25	225 (BK/YE)	To Allison 2000/2400 Transmission
11	48	Terminates in Harness	26	226 (WH/BK)	To Allison 2000/2400 Transmission
12	48	Terminates in Harness	27	227 (YE)	To Allison 2000/2400 Transmission
13	213 (DB/YE)	Turbine Shaft Speed (TSS) Sensor (High)	28	228 (DB)	To Allison 2000/2400 Transmission
			29	229 (RD/OG)	To Allison 2000/2400 Transmission
14	214 (PK/LB)	Turbine Shaft Speed (TSS) Sensor (Low)	30	48	Terminates in Harness
			31	231 (BK/YE)	To Allison 2000/2400 Transmission
15	215 (VT/LG)	Output Speed Sensor (High)	32	232 (LG/YE)	To Allison 2000/2400 Transmission