C199

12B637

A254
5R55E Transmission

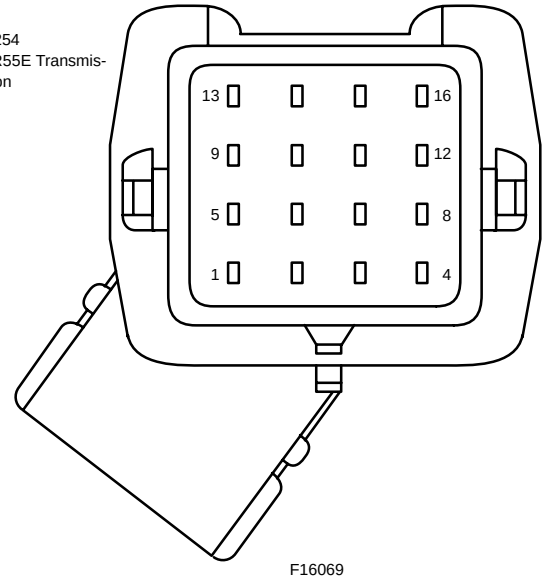

F16069

Pin	Circuit	Circuit Function
1	34 (LB/OG)	Voltage supplied in Start and Run (overload protected)
2	970 (DG/WH)	Turbine shaft speed (TSS) sensor
3	359 (GY/RD)	signal, return
4	923 (OG/BK)	Transmission Fluid Temperature (TFT) sensor, input
5	480 (VT/YE)	Torque Converter Clutch (TCC) solenoid
6	–	not used
7	971 (PK/BK)	Shift solenoid C
8	359 (GY/RD)	signal, return
9	924 (BN/OG)	Shift solenoid D
10	34 (LB/OG)	Voltage supplied in Start and Run (overload protected)
11	34 (LB/OG)	Voltage supplied in Start and Run (overload protected)
12	925 (WH/YE)	Electronic Pressure Control (EPC) solenoid
13	–	not used
14	315 (VT/OG)	Shift solenoid B
15	–	not used
16	237 (OG/YE)	Shift solenoid A

C201a

14401

A112
Generic Electronic Module (GEM)

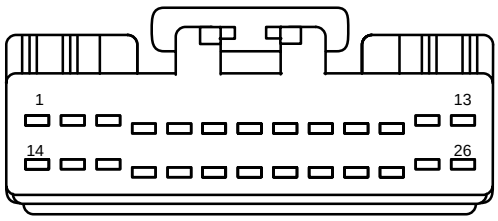

F26015

Pin	Circuit	Circuit Function
1	–	not used
2	–	not used
3	–	not used
4	–	not used
5	–	not used
6	–	not used
7	761 (GY/RD)	Door ajar switch, right front
8	765 (YE/BK)	Door ajar switch, left front
9	627 (BK/OG)	Door ajar indicator, control
10	158 (BK/PK)	Key warning switch, input
11	14 (BN)	Power, Exterior lamps
12	871 (YE)	Safety belt indicator, control
13	680 (LB/OG)	Wiper/washer, delay input
14	570 (BK/WH)	Ground
15	671 (LB)	Wiper run/park relay, switched output
16	–	not used
17	–	not used
18	647 (GY/LB)	Wiper high/low relay, control
19	646 (YE/WH)	Wiper run/park relay, control
20	1083 (LB/BK)	Air bag, tone driver
21	359 (GY/RD)	signal, return
22	684 (PK/YE)	Wiper/washer, input
23	85 (BN/LB)	Safety belt buckle switch, input
24	686 (TN/RD)	Washer motor relay, control
25	70 (LB/WH)	ISO Bus
26	570 (BK/WH)	Ground